



# Parts and Filters

## *2006 Catalog*

Revised Date:  
July 14, 2006

Supersedes previous versions of this catalog

Contact Global Finishing Solutions for your local Distributor - (800)848-8738

Part No.	Description	Notes	Qty. Per Box
----------	-------------	-------	--------------

**DOWNDRAFT CEILING / INTAKE****Intake Pads**

High efficiency filters extract 100% of visible dust and removes micron particles. Internal welded steel frame for easy fit with self-sealing gasket. Internal wire support and heat sealed seams prevent media flutter. Two plies of tough resilient polyester fibers with a better tackifier. U.L. listed, Class 2923X for flammability.

AR-470-K20	20" X 20" X 2"	Air Inlet	20
PF-425-K12	20" X 25"	Inlet Panel	12
PF-1000-K12	20" X 48"	Micro Clean (can be used on Mix Rooms)	12
PF-2000-K15	20" X 48"	Micro Clean	15
217-200	20" X 48" X 2"	Intake Panel	8
216-550	20" X 20" X 1"	Panel Intake Diffusion	24
217-011	16" X 25" X 1"	Panel Intake Diffusion	24
217-012	20" X 20" X 1"	Panel Intake Tacky (Same as 217-500)	24
217-013	20" X 25" X 1"	Panel Intake Tacky (Same as 217-501)	24
217-012-Green	20" X 20"	Panel Intake Tacky, Green	24
217-014	24" X 24" X 1"	Panel Intake Tacky, Rigid Metal Frame	24

Tacky Roll Media: Progressively structured high performance media made from synthetic fibers, resin bonded with special adhesive. The filters do not migrate paint particles. Self-extinguishing and have a 100% coating of fibers. U.L. Class 2 approved.

216-234	55" X 96"	Roll Media Tacky	2
216-237	55" X 120"	Roll Media Tacky	2
216-528	50" X 90"	ME1 Polyester Media, Tacky - A.J. DRALLE	1
216-531	50" X 30"	ME1 Polyester Media, Tacky - A.J. DRALLE	1

Controlled Air Flow (CAF): Filters made of high temperature media with a NEW layered design that provides significant improvement in the air speeds of the envelope around the vehicle. CAF layered media offers a blanket restriction of 70%, 30%, and 0%.

205213	75" X 30"	CAF Blanket	1
205214	75" X 36"	CAF Blanket	1
205215	75" X 120"	CAF Blanket	1
205216	75" X 149"	CAF Blanket	1
205219	81" X 144"	CAF Blanket	1
205220	81" X 36"	CAF Blanket	1
205225	75" X 90"	CAF Blanket	1

High Temperature Roll Media: Global Finishing Solutions only uses Hi Temp Compatible media. These filters are suitable for use with the Smart Cure type control systems, which generate higher heat during the cure cycles. Polyester fiber bonded with a polyvinyl chloride binder. Flame Retardant added.

305207	21" X 144"	Diffusion Media High Temperature (FMI21144)	1
305212	21" X 36"	Diffusion Media High Temperature (FMI2136)	1
305209	37-1/2" X 144"	Pyramid Downdraft/Semi Downdraft Diffusion Media High Temperature	1
305210	64" X 120"	6.75m - New Style Diffusion Media High Temperature	1
305211	64" X 149"	6.75m - New Style Diffusion Media High Temperature	1
305217	61" X 120"	6.75m - Old Style Diffusion Media High Temperature	1
305218	61" X 149"	6.75m - Old Style Diffusion Media High Temperature	1
305219	81" X 144"	Concept 1000 Sidedraft/Semi-Downdraft, Diffusion Media High Temperature (FMI81144)	1
305221	81" X 108"	Truck and Other Sizes (FMI81108) Diffusion Media High Temperature	1

Part No.	Description	Notes	Qty. Per Box
High Temperature Roll Media con't:			
305223	64" X 108"	Truck and Other Sizes Diffusion Media High Temperature	1
305224	64" X 144"	Truck and Other Sizes Diffusion Media High Temperature	1
305213	75" X 30"	Ultra 2000 Extension Diffusion Media High Temperature	1
305214	75" X 36"	Ultra 2000 Extension Diffusion Media High Temperature	1
305215	75" X 120"	Ultra 2000 - 6.75m (FMI75120) Diffusion Media High Temperature	1
305216	75" X 149"	Ultra 2000 - 7.5m (FMI75149) Diffusion Media High Temperature	1
305220	81" X 36"	Ultra 2000 Extension (FMI8136) Diffusion Media High Temperature	1
305225	75" X 90"	Ultra 2000 Extension Diffusion Media High Temperature	1
300210	By Sq. Foot	Custom Cut Filters	

### PREP PLENUM

#### High Temperature Roll Media:

Global Finishing Solutions only uses Hi Temp Compatible media. These filters are suitable for use with the Smart Cure type contr which generate higher heat during the cure cycles. Polyester fiber bonded with a polyvinyl chloride binder. Flame Retardant add

305210	64" X 120"	Standard Prep Plenum Diffusion Media High Temperature	1
305215	75" X 120"	Ultra Prep Plenum Diffusion Media High Temperature	1

### EXHAUST FILTERS

#### Exhaust Pads

Paint Pockets® (White): Paint Pockets is a uniquely designed, honeycomb style filter that holds up to five times the over spray of some other types of arrestor filters and cuts over spray penetration by as much as 66%, 99.8 efficient. (Green): Economy

PP-2020-K30	20" X 20"	Paint Pockets White	30
PP-2025-K30	20" X 25"	Paint Pockets White	30
PPG-2020-K40	20" X 20"	Paint Pockets Green	40
PPG-2025-K40	20" X 25"	Paint Pockets Green	40

Fiberglass Pads: Exhaust Filter Pads are designed exclusively to collect paint over spray. They are made from continuous filament glass fibers with an open weave pattern that allows particles to penetrate deep into the pad and hold more paint. U.L. Class 2 approved.

217-001	20" X 20" X 2"	Fiberglass Pad	100
217-002	20" X 25" X 2"	Fiberglass Pad	100

Polyester Pads: Made from Multi-Layered, multi-density polyester. High Efficiency, Average 99.5%. High Paint Holding Capacity 5.06 lbs. Approved and listed: Class 2 by Underwriters Laboratories and conform to OSHA Standards.

217-006	20" X 20" X 1"	Polyester Pad, A.J. DRALLE	40
217-027	20" X 25" X 1"	Polyester Pad, A.J. DRALLE	25

Panel Filters: Final filter for Ovens.

217-516	24" X 24" X 12"	Plywood Final Filter (Formally Blu-Surf)	1
217-518	24" X 24" X 12"	Glasflos Filter Final (Formally Blu-Surf)	1

SmartMedia: High efficiency filter made of a unique three-layer system, compressed and vacuum-packed for ultra compressibilit freight cost, disposal cost and increased storage space.

FLE-34-25-2020	20" x 20" x 2"	Smartmedia34* Tacky Polyester/Fiberglass	100
FLE-34-25-2025	20" x 25" x 2"	Smartmedia34* Tacky Polyester/Fiberglass	100

Part No.	Description	Notes	Qty. Per Box
<b>Roll Media</b>			
Paint Pockets® (White): Paint Pockets is a uniquely designed, honeycomb style filter that holds up to five times the over spray of some other types of arrestor filters and cuts over spray penetration by as much as 66%, 99.8 efficient. (Green): Economy Paint Pocket same style filter as white, 99.4 efficient.			
PP-2050-K2	20" X 50'	Paint Pockets White	2
PP-2450-K1	24" X 50'	Paint Pockets White	1
PP-3050-K1	30" X 50'	Paint Pockets White	1
PP-3650-K1	36" X 50'	Paint Pockets White	1
PP-4050-K1	40" X 50'	Paint Pockets White	1
PP-4550-K1	45" X 50'	Paint Pockets White	1
PP-4850-K1	48" X 50'	Paint Pockets White	1
PP-6050-K1	60" X 50'	Paint Pockets White	1
PPG-3060-K1	30" X 60'	Paint Pockets Green	1
PPG-3660-K1	36" X 60'	Paint Pockets Green	1
PPG-4860-K1	48" X 60'	Paint Pockets Green	1
PPG-6060-K1	60" X 60'	Paint Pockets Green	1
SmartMedia: High efficiency filter made of a unique three-layer system, compressed and vacuum-packed for ultra compressibility to reduce freight cost, disposal cost and increased storage space.			
FLE-BL35-21X2	30" x 21' x 2"	Smartmedia35* Tacky Poly/Fiberglass Media	2
FLE-BL35-25X2	30" x 25' x 2"	Smartmedia35* Tacky Poly/Fiberglass Media	2
FLE-BL35-27X2	30" x 27' x 2"	Smartmedia35* Tacky Poly/Fiberglass Media	2
FLE-BL35-30X2	30" x 30' x 2"	Smartmedia35* Tacky Poly/Fiberglass Media	2
Fiberglass Roll Media: Available in 1" – 2" thickness and 24" to 84" width. U.L. Class 2 approved.			
217-016	40" X 2" X 75'	Fiberglass Roll Media	1
217-017	30" X 2" X 75'	Fiberglass Roll Media	1
217-019	42" X 2" X 75'	Fiberglass Roll Media	1
217-020	24" X 2" X 75'	Fiberglass Roll Media	1
217-021	36" X 2" X 75'	Fiberglass Roll Media	1
217-022	48" X 2" X 75'	Fiberglass Roll Media	1
217-023	60" X 2" X 75'	Fiberglass Roll Media	1
217-024	72" X 2" X 75'	Fiberglass Roll Media	1
217-025	84" X 2" X 75'	Fiberglass Roll Media	1
217-029	42" X 2" X 300'	Fiberglass Roll Media	1
217-080	60" X 2" X 300'	Fiberglass Roll Media	1
217-088	48" X 2" X 300'	Fiberglass Roll Media	1
217-089	84" X 2" X 300'	Fiberglass Roll Media	1
217-095	36" X 2" X 300'	Fiberglass Roll Media	1
217-510	48" X 250 Yds	Roll Media (Formally Blu-Surf)	1
High Performance Polyester Roll Media: Designed for High Production Applications. Features High Capacity Capture and High Efficiency Air Pollution Control. U.L. Listed Class 2 Approved.			
217-030	24" X 1" X 50'	Polyester Media	1
217-032	48" X 1" X 50'	Polyester Media	1
217-036	36" X 1" X 75'	Polyester Media	1
217-037	48" X 1" X 75'	Polyester Media	1
217-038	60" X 75'	Polyester Media	1
217-039	72" X 2" X 50'	Polyester Media	1
217-043	30" X 2" X 50'	Polyester Media	1

Part No.	Description	Notes	Qty. Per Box
<b>AIR MAKE-UP</b>			
Filters to clean air entering AMU's, fabric and cleanables.			
216-120	24" X 24" X 2"	Cleanable - EZ KLEEN Aluminized	1
216-121	20" X 20" X 1"	Cleanable - EZ KLEEN Aluminized	1
216-122	16" X 25" X 1"	Cleanable - EZ KLEEN Aluminized	1
216-124	20" X 25" X 1"	Cleanable - EZ KLEEN Aluminized	1
216-125	20" X 20" X 2"	Cleanable - EZ KLEEN Aluminized	1
216-126	16" X 25" X 2"	Cleanable - EZ KLEEN Aluminized	1
216-128	20" X 25" X 2"	Cleanable - EZ KLEEN Aluminized	1
216-129	12" X 12" X 1"	Cleanable - EZ KLEEN Aluminized	1
AR-9022-K12	20" X 20"	Air Make-Up Panel	12
AR-9026-K12	20" X 25"	Air Make-Up Panel	12
AR-9027-K12	16" X 20"	Air Make-Up Panel	12
FS-2072-K6	20" X 72"	Burner Filter	6
PF-500-K6	20" X 25" X 10"	Secondary Extract Filter, Cube	6
PF-879-K2	25" X 75"	Air Make-Up Panel	2

**POWDER & DUST FILTERS****Bag Filters**

Pocketed filter, individual pocket edges and internal dividing bars are heat sealed for no stitch holes. Pockets are assembled using individual modular design. The exceptionally high dust holding capacity provides long life.

216-504	20" X 20" X 15"	Fiberbond - 2 Pocket Primary	1
216-505	20" X 20" X 12"	6 Pocket Final, Same as 216-515	1

**Pad**

Medium efficiency pleated panel filter. Contains up to 16 pleats per linear foot. Radial pleat construction for minimum pressure. Available in U.L. Class 2 or 1, in 4", 2" and 1" depths. Nonwoven cotton/synthetic blend media.

216-003	20" X 20" X 4"	Pleated FARR 30/30 CL2, Powder Booth & Dust Collection	5
216-011	20" X 20" X 2"	Pleated FARR 30/30 Panel Filter, Powder Booth & Dust Collection	1
216-013	20" X 25" X 2"	Pleated FARR 30/30 Panel Filter	1
216-057	20" X 20" X 12"	Riga-Flo P95	1

**Cartridge**

Cartridge filters are used for Powder Recover booths as well as uses in safe air dust collection systems.

216-202	26" X 12 3/4"	Metal & Wood - Fire Retardant, Powder Booth & Dust Collection	1
216-203	26" X 12 3/4"	Cellulose, Powder Booth & Dust Collection	1
216-204	26" X 12 3/4"	Fibrous, Powder Booth & Dust Collection	1

**2 and 3 STAGE FILTRATION**

Three stage system specifically designed for the collection of aerospace chromate coating overspray, virtually eliminating dangerous chromium emissions up the stack. *Exceeds E.P.A Method 319: A complete set of test results from an accepted independent laboratory is available on request. Test results shall meet or exceed the minimum requirements of E.P.A. Test Method 319 for Aerospace Manufacturing and Reworking (NESHAP).*

**Roll Media**

Stage 1: Multi-Layered Polyester Media. The air-entry side is constructed of a mixture of lofted denier fiber. The air-leaving side is comprised of a mixture of heavily needled media to densify. Media weighs 1.2oz per sq. ft.

216-502	36" X 50'	CPA - Paint Arrestor Roll Media	1
216-503	45" X 50'	CPA - Paint Arrestor Roll Media	1

**Pad**

Stage 2: The Filter Panel is constructed of two different layers of tackified polyester media, sealed together so the tackified layers of each media touch in the center. The air-entry layer is constructed of multi-layered, multi-density polyester with heavy, non-migrating tackifier on the air-leaving side. The air-leaving media is a heavily needled polyester, densified up to 1/4" thick, tackified on the air-entry side with a weight of 0.42oz per sq. ft.

216-501	20" X 20" X 1"	MEPT Panel, A.J. DRALLE	24
216-5011	20" X 20"	CPA, Multi-Layer & Density, A.J. DRALLE	24
216-517	24" X 24" X 1"	MEPT Panel, A.J. DRALLE	24

Part No.	Description	Notes	Qty. Per Box
<b>Bag Filters</b>			
Stage 3: the 6-Pocket Bag Filter, is constructed of a composite of pre-filter, melt blown and spun bound polyester fibers. The pockets are sewn together on the perimeter with two heat seals, forming three air channels in each bag pocket. The bag pockets on the metal support is inserted into a galvanized metal header. The galvanized header contains an acceptable sealing agent inside of each header to eliminate the possibility of paint bypass within the filter.			
216-500	20" X 20" X 15"	2 Pocket, CG100	1
216-505	20" X 20" X 12"	6 Pocket, XFP-6000, Same as 216-515	1
216-516	24" X 24" X 12"	6 Pocket, XFP-6000	1

**AUTOMOTIVE****Pocket & Cartridge**

Final Filters on automotive lines.

33033	24"X 24"X 2"	Prep Cartridge	4
405214	23 1/2" X 47"	Framed 5 Pocket - Scrim Included ✓ (pre/post position)	4
405219	19 1/2" X 36 3/4"	6 Pocket - High Capacity	4
405213	23 1/4" X 47" X 9"	6 Pocket - Green	4
405216	19 1/4" X 37" X 4"	Cartridge - High Capacity	4
405217	19 3/4" X 37" X 4"	Cartridge - High Capacity	4

**Fiberglass Roll Media**

Available in 1" – 2" thickness and 24" to 84" width. U.L. Class 2 approved.

500200	20" X 2 1/2" X 300'	Fiberglass Roll Media - 22 gram	1
500250	25" X 2 1/2" X 300'	Fiberglass Roll Media - 22 gram	1
500300	30" X 2 1/2" X 300'	Fiberglass Roll Media - 22 gram	1
500360	36" X 2 1/2" X 300'	Fiberglass Roll Media - 22 gram	1
500400	40 1/2" X 2 1/2" X 300'	Fiberglass Roll Media - 22 gram	1

**PAINT ARRESTOR - Paper**

Paper Mesh: The mesh filters are comprised of numerous layers of U.L. Class 2 approved kraft media.

216-088	20" X 20" X 1"	Mesh - Columbus Supra I	60
216-089	20" X 25" X 1"	Mesh - Columbus Supra I	70
216-095	42" X 2" X 30'	Paper - Columbus Supra II	1
216-113	42" X 1 1/2" X 30'	Polyester - High Performance	1

Paper Mesh Polyester Backing: These filters are highly efficient and are known for their high dust holding capacity. They are constructed of seven layer expanded paper with a white polyester backing.

EF-2020-K40	20" X 20"	Mesh with Polyester Backing, Same as 216-092	40
EF-2025-K40	20" X 25"	Mesh with Polyester Backing, Same as 216-093	40
EF-3125-K2	31" X 25'	Mesh with Polyester Backing	2
EF-4253-K1	42" X 53'	Mesh with Polyester Backing	1

Pleated Cardboard: The unique collapsible pleated filter with round holes captures paint particles outside the air stream in the holding pockets.

PEF-330-K1	3' X 30'	Pleated Cardboard with Round Holes	1
PEF-330-K3	3' X 30'	Pleated Cardboard with Round Holes	3
PEF-330-K60	3' X 30'	Pleated Cardboard with Round Holes	60

Part No.	Description	Notes	Qty. Per Box
<b>MISCELLANEOUS FILTER COMPONENTS</b>			
216-111	Filter Clip	C-78-2 FARR	
JSG8-0480	J-Strip	48" Sections (414-052)	
FHG8-0480	Filter Hook	48" Sections (216-305)	
216-499	Filter Clip	1" A.J. DRALLE, for 216-504, 216-505 Filter	
217-003	20" X 20"	Filter Grid, 4 Tips per Grip, not included	
217-004	20" X 25"	Filter Grid, 4 Tips per Grip, not included	
248-016	Rubber Tips	For 217-003 & 217-004	
217-050	Filter Insertion Tool	Pizza Cutter	
29-2441	Filter Insertion Tool	Pizza Cutter (Binks)	
39088	Frame Hanger	Nylon Frame Hanger	
39090	Frame Corner	Nylon Frame Corner	
39092	Frame Nut	Brass Frame Nut	
BH850	Frame Bolt	Filter Frame Bolt (8MM X 50MM)	
DF-9758-K1	20" X 20"	Obsolete use 217-003	
DF-9759-K1	20" X 25"	Obsolete use 217-004	
DVA-5371	Filter Retaining Clip		
DVA-5372	Snapper Bar	40" Roll Media	
DVA-5373	Support Strip	20" Roll Media	
PPZ48	Track	Zipper Track 48" (PP-004-ZIPPER)	
PPZ96	Track	Zipper Track 96" (PP-008-ZIPPER)	
PPZ-CENTER	Support	Zipper Center Support (PP-Center Support)	
PPZ-CORNER	Bracket	Zipper Corner Mounting Bracket	
PPZ-TOOL	Installation Tool	Zipper Installation Tool (PP-ZIP-IT-001)	

*Additional Filter Sizes and Pricing Available, Please Call or E-Mail Your Specifications.*

#### CONVERSION CHART

##### Binks/DeVilbiss

Part No.		Global Finishing Solutions Part No.
29-1486	20" X 25"	PF-425-K12
29-1487	20" X 25"	PF-425-K12
29-1587	35.5" X 127"	300210 Diffusion Media cut to size
29-159	20" X 20"	EF-2020-K40
29-158	20" X 25"	EF-2025-K40
29-1801	42" X 168"	300210 Diffusion Media cut to size
29-1809	36" X 144"	300210 Pyramid- Diffusion Media cut to size
29-1811	36" X 108"	300210 Mix Room- Diffusion Media cut to size
29-2358	20" X 25"	PP-2025-K30
29-2359 (30')	45" X 30'	PP-4550-K1 (50')
29-2371	20" X 20"	PP-2020-K30
29-2379	35.75" X 26"	PP-3650-K1 (36" X 50' roll)
29-2440 (30')	36" X 30'	PP-3650-K1 (50')
29-2446	36" X 50'	PP-3650-K1
29-2447	45" X 50'	PP-4550-K1
29-256	20" X 20"	EF-2020-K40
29-257	20" X 25"	EF-2025-K40
29-356	3' X 30'	PEF-330-K3, (3 Pack)
29-359	3' X 30'	PEF-330-K1
29-486	20" X 20" X 2"	AR-470-K20
PF-448-K8	20" X 48" X 2"	217-200
AR-9739-K2	20" X 75"	PF-879-K2

Part No.	Description	Notes
<b>ELECTRICAL COMPONENTS</b>		
<b><i>Breakers/Fuses</i></b>		
103-023	Fuse	250V 15 Amp Class RK5
103-024	Fuse	250V 20 Amp Class RK5
103-102	Fuse Block	250V 30 Amp 1 Pole
103-103	Fuse Block	250V 30 Amp 1 Pole
103-104	Fuse Block	250V 30 Amp 1 Pole
103-106	Fuse Block	250V 60 Amp 2 Pole
103-107	Fuse Block	250V 60 Amp 3 Pole
103-110	Fuse Block	250V 100A RK5 3 Pole
103-112	Fuse Block	600V 30 Amp 1 Pole
103-113	Fuse Block	600V 30A 2 Pole Class H
103-114	Fuse Block	600V 30A 3 Pole Class H
103-191	Fuse Block	600V 2 Amp Class CC
105-018	Transformer	1000VA Open 1PH 480-240/120V
106-048	Fuse Holder	Flip Down Style - Curetronic
118-249	Breaker (new style)	6-10 Amps (replaces GV2-ME14)
GV1-A01	Auxiliary Contact Block	10A (for GV3 Series Breakers)
GV2-AN11	Auxiliary Contact Block	6A (for GV2 Series Breakers)
GV2-ME08	Breaker (new style)	2.5-4 Amps
GV2-ME10	Breaker (new style)	4-6 Amps
GV2-ME16	Breaker (new style)	9-14 Amps
GV2-ME20	Breaker (new style)	13-18 Amps
GV2-ME21	Breaker (new style)	16-20 Amps
GV2-ME22	Breaker (new style)	20-25 Amps
GV2-ME32	Breaker (new style)	25-32 Amps
GV2-P22	Breaker (new style)	20-25 Amps
GV2-P32	Breaker (new style)	24-32 Amps
GV3-ME25	Breaker (new style)	16-25 Amps
GV3-ME40	Breaker (new style)	25-40 Amps
GV3-ME63	Breaker (new style)	40-63 Amps
Z1.299.4053.0	Fuse Holder	with 6 Amp Fuse

<b><i>Relays</i></b>		
106-056	Relay 24 Volt	DC Ice Cube 4 Pole - Curetronic CP
106-057	Relay Base	14 Pin Ice Cube - Curetronic CP
111-001	Relay Ice Cube	3 PDT
111-049	Relay Socket	11 PIN
CA2KN22B7	Relay 10 Amp	2ea N/O 2 ea N/C
LC1D1201B7	Relay 25 Amp	Auxiliary Contact N/C
LC1D1210B7	Relay 25 Amp OBSOLETE	Auxiliary Contact N/O (use LC1D12B7)
LC1D12B7	Relay 25 Amp (new style)	Auxiliary Contact N/O & N/C (Replaces LC1D1210B7)
LC1D1801B7	Relay 32 Amp OBSOLETE	Auxiliary Contact N/C (use LC1D18B7)
LC1D1810B7	Relay 32 Amp OBSOLETE	Auxiliary Contact N/O (use LC1D18B7)
LC1D18B7	Relay 32 Amp (new style)	Auxiliary Contact N/O & N/C (Replaces LC1D1801B7 & LC1D1810B7)
LC1D25B7	Relay 40 Amp (new style)	Auxiliary Contact N/O & N/C (Replaces LC1D2510B7)
LC1D3210B6	Relay 50 Amp	Auxiliary Contact N/O
LC1D32B7	Relay 50 Amp (new style)	Auxiliary Contact N/O & N/C

Part No.	Description	Notes
<b>Adder Blocks</b>		
LA1DN11	Adder Block	1 N/O 1 N/C
LA1DN20	Adder Block	2 N/O
LA1DN22	Adder Block	2 N/O 2 N/C
LA1DN31	Adder Block	3 N/O 1 N/C
LA1DN40	Adder Block	4 N/O
LA2DT2	Adder Delay Timer	1- 30 sec

**Overloads**

118-105	Overload (new style)	1-1.7 Amps (replaces LRD06)
118-108	Overload (new style)	2.5-4 Amps (replaces LRD08)
118-109	Overload (new style)	4-6 Amps (replaces LRD10)
118-110	Overload (new style)	5.5-8 Amps (replaces LRD12)
118-120	Overload	37-50 Amp (replaces LR2D3357)
125-029	Overload	HTR SQD B 11.5
125-030	Overload	HTR SQD B 12.8
125-032	Overload	HTR SQD B 15.5
125-033	Overload	HTR SQD B 17.5
125-034	Overload	HTR SQD B 19.5
125-035	Overload	HTR SQD B 22
LR2D1305	Overload	0.63-1 Amps
LR2D1306	Overload	1-1.6 Amps
LR2D1308	Overload	2.5-4 Amps (use 118-108)
LR2D1310	Overload	4-6 Amps
LR2D1312	Overload	5.5-8 Amps
LR2D1314	Overload	7-10 Amps
LR2D1316	Overload	9-13 Amp (575V-10HP)
LR2D1321	Overload	13-18 Amp
LR2D1322	Overload	17-25A
LR2D13X6	Overload	1.25-2 Amps
LR2D2353	Overload	23-32 Amp
LR2D3355	Overload	30-40 Amp
LRD05	Overload (new style)	0.63-1 Amps
LRD07	Overload (new style)	1.6-2.5 Amps
LRD14	Overload (new style)	7-10 Amps
LRD16	Overload (new style)	9-13 Amps (575V-10HP)
LRD21	Overload (new style)	12-18 Amps
LRD32	Overload (new style)	23-32 Amp
LRD3357	Overload (new style)	37-50 Amp (use 118-120)
LRD3359	Overload (new style)	48-65 Amp
LRD35	Overload (new style)	30-38 Amp

**Switches/Contacts/Coils**

117-538	Air Flow	JD-2 Blue Spring .07-1.7
117-543	Air Flow Switch	JD-2 Grey, (.1-4)
117-551	Pressure Switch	C6097A-1020 (Blu-Surf)
117-553	Pressure Switch	High Gas C6097B1044 (Blu-Surf)
118-154	Contact	Auxiliary IEC Contactors
127-191	Contact	8910DPA13V02
127-228	Contact Block	9001KA2
127-229	Contact Block	9001KA3

Part No.	Description	Notes
<b><i>Switches/Contacts/Coils</i></b>		
127-234	Switch	9001KR1U Push Button
127-236	Selector Switch	9001KS11B
127-260	Switch	Class 1 XP 9007 CR53 B2
127-292	Selector Switch	IEC 22MM 2 POS N.O.
127-299	Selector Switch	IEC 3POS Head Only
127-307	Contact Block	IEC Normally Open, Same as ZBE101
127-308	Contact Block	IEC Normally Closed
127-369	Aux. Contact	9999D20, 2 N.O.
1640-0	Pressure Switch	.01-0.2" WC
242-004	Pressure Switch	.02 - 2.0" WC
242-012	Explosion Proof Switch	with Plunger
242-014	Proximity Switch	Class 1 Division 2
242-122	Switch Low Air Flow Pressure	.27" (replaces 242-123) ✓
260-168	Thermo Switch	842518
37093	Control Panel Key	Plastic/Door Lock
412-008	Prox Switch Bracket	Bracket Mounting Prox Switch Prod Doors
412-009	Prox Switch Bracket	Bracket Shut-Off Prox Switch All Doors
600-003	Safety Shut-Down Switch	Dirty Filter
600-004	Safety Shut-Down Switch	Dirty Filter with Alarm
600-005	Safety Shut-Down Switch	Dirty Filter-Explosion Proof, includes Switch and Solenoid valve
600-035	Switch	Gun Hanger-Explosion Proof, includes Switch, Lever Arm, Bracket and Rod
650-001	Explosion Proof Switch	On/Off
650-002	General Purpose Switch	On/Off
KK-4500	Airflow Switch Kit	.05 - 1.0" WC. SPDT
LGW3A2	Negative Pressure Switch	.4 - 3 MBAR
LX1D2B6	Coil	24VAC Series LC1D12 & D18
LX1D4B6	Coil	24VAC Series LC1D25 & D32
LX1D4M6	Coil	220VAC Series LC1D25 -D32
LX1D4T6	Coil	480VAC Series LC1D25 -D32
Q99-900901	Control panel Key	Metal
SS-9861	Push Button Station	General Purpose
SS-9905-S	Light Switch	(2510-FG1) used on Mix Room
ZB2BC4	Switch	Red Stop Button
ZB2BD5	Switch	3 Pos. Spr. Return to Ctr.
ZB2BE101	Contact Switch	N/O
ZB2BE102	Contact Switch	N/C
ZB2BG6	Switch	Key Start Spring Return
ZB2BZ101	Mounting Collar	w/ 1 N/O Contact
ZB4BC4	Switch (new style)	Red Stop Button
ZB4BD2	Switch (new style)	2 Position Maintained
ZB4BD5	Switch (new style)	3 Pos. Spr. Return to Ctr.
ZB4BG6	Switch (new style)	Key Start Spring Return
ZB4BZ101	Mounting Collar (new style)	w/ 1 N/O Contact
ZBE101	Contact (new style)	N/O, Same as 127-307
ZBE102	Contact (new style)	N/C

Part No.	Description	Notes
<b>Main Disconnect Isolators</b>		
39076	Isolator for SBC & E/M	63 Amps 6 Pole Rectangular
39077	Isolator for SBC & E/M	80 Amps 6 Pole Rectangular
109-081	Non-Fused Disc. SW	60 Amp
109-083	Non-Fused Disc. Handle	16-100 Amp
109-084	Non-Fused Disc. SW	Shaft .2 X .2 X 7.1
194E-A63-1753	Isolator	Main 3P Block, Switch Body
194E-A63-NP	Isolator	Side Blocks
194E-A80-1753	Isolator	Main 3P Block, Load Switch
194E-A80-NP	Isolator	Side Blocks, Pole Fourth
3906740A	Isolator (Old panels)	40 Amps 6 Pole Round
3906763A	Isolator (Old panels)	63 Amps 6 Pole Round
39068	Isolator H.O. groups	125 Amps 6 Pole Rectangular
9070T200D4	Isolator	XMTR277-120V 200va (9070FSC1)
LA 2-G 3393	Isolator	Shaft Extension - Metal Short Shaft

**Boards/E-Proms**

9CA0450	SBC Cable	Shielded for PT, Sold by the Foot
9CA0506	SBC Cable	Sold by the Foot
9TE0290	SBC Plus	Master & Slave (Pair)
9TE0290-M	SBC Plus	Master Board (Direct or Indirect)
9TE0290-S	SBC Plus	Slave Board (Direct or Indirect)
9TE0295	SBC 0-10V DC Module	SBC Slave Board
CXP8	Remote Panel	Curetronic Control Panel
CXP8-TS-CX100K	Remote Panel	Curetronic Probe and Wire for Remote
SBC PLUS 1/GF	SBC Plus 1	Old Style Control Panel
SBC PLUS 1/GF-FD	SBC Plus 1	New Style Control Panel
SBCM	SBC Master Board	Direct & Indirect
SBCS	SBC Slave Board	Indirect
SBCS-D	SBC Slave Board	Direct
WESBPM03	SBC PLUS E-Prom	Master E-Prom
WESBPS03	SBC PLUS E-Prom	Slave E-Prom
WESMC-M20	SBC Master E-Prom	Smart Cure (WE SBCM 20)*
WESMC-S20	SBC Slave E-Prom	Smart Cure (WE SBCS 20)*

\* If replacing a Non Smart Cure E-Prom to a Smart Cure E-Prom, WE SBCM-20 and WE SBCS-20 will need to be replaced.

**Starters & Timers**

127-205	Starter	8911DPS013V02
127-207	Starter	8911DPS033V02
127-219	Start/Stop	General Purpose, Nema 1 SQD
127-221	Start/Stop	Explosion Proof, Nema 7&9
111-022	Timer	120V Multifunction 2PDT
111-030	Timer	Process Solid State
117-670	Timer	Purge 10SEC. ST7800A-1021
39064	Hour Counter	24Vac
39071	Bake/Cool Timer	Crouzet 24 Vac

**Regulators**

117-567	Regulator	1.0 NPT 143-80-2
117-577	Regulator Pilot	.5 NPT 325-3-44

Part No.	Description	Notes
<b>INDIRECT FIRE COMPONENTS</b>		
<i>Fire Structural Components</i>		
16330	Low Press Switch	2-16" W.C.
16345	Hi Press Switch	2-16" W.C.
39069	ITM Temp. Controller	Direct (Logic)
39070	ITM Temp. Controller MPS	Indirect Fire (formerly Ascon)
39072	ITM Temp. Controller MPS	Direct Fire (formerly Ascon)
39073	High/Low Limit	248' F Maximum
91100	Ball Joint	Rod Connections
111-100	Sequence Controller	3 Output 30 Sec.
111-101	Sequence Controller	6 Output
111-102	Sequence Controller	10 Step
111-103	Sequence Controller	20 Step
117-192	Flame Safety Relay	Amplifier (R7847A-1082)
117-193	Flame Safety Relay	Electronic
117-194	Flame Safety Relay	Base Electronic
117-232	Flame Safety Relay	Amplifier - Rupp (R7847A-1025)
117-325	Temp Process Controller	1/8 DIN
117-667	Sub Base	(Formally Blu-Surf, Q7800B-1003)
9041899	Lower Frontal Panel	Required with New Heat Exchanger
9041900	Middle Frontal Panel	Required with New Heat Exchanger
9041901	Upper Frontal Panel	Required with New Heat Exchanger
9GU9260	Heat Exchanger Gasket	Stovepipe Gasket (1 & 1.5MBTU)
C7027A1023	U.V. Scanner	0-215°F (for LP Gas)
Q7800B1011	Sub Base	(RM7895)
R4795A1016	Flame Safeguard	J30 & J50
R7289A1004	Amp. Rectification	(R4795)
R7290A1001	Amp. Ultra Violet	(R4795)
R7849A1023	Amp. Ultra Violet	(RM7895 .w. U.V. Scanner) (117-406)
RM7895A1014	Flame Safeguard	J30 & J50
RV20L	Pilot Regulator / Maxitrol	3/8" Inlet @ 2.8 - 5.2 W.C. Output
RV61	Main Regulator / Maxitrol	1.0" Inlet @5"-12" W.C. Output
RV81	Main Regulator / Maxitrol	1.5" Inlet @5"-12" W.C. Output (117-582)
ST71A1018	Purge Timer 30S	(R4795)
ST7800A1062	Purge Timer 90S	
V4943A1011	Gas Valve	1" / 120Vac
<i>Fire Control Components</i>		
39063	Temperature Sensor	PT-100 (100 - 140 OHM)
117-300	Thermocouple Wire	Type K 2 Wire, Sold by the Foot
117-303	Thermocouple	Type J Miniature Head
117-413	Thermocouple	Type JJ 12"
117-414	Thermocouple	Type KK 6"
117-415	Thermocouple	Type KK 8"
117-416	Thermocouple	Type KK 12"
117-417	Thermocouple	Type KK 24"
117-420	Thermocouple	Type KK 6" High Temp
117-425	Temp Controller	Series 104 WATLOW
117-437	Temp Controller	6000 61111010 MIC
117-438	Temp Controller	6000 6131101 MIC
117-456	Temp Controller	E5AX-A-FMF
117-684	Thermocouple Wire	Type K 20GA, Sold by the Foot
650-008	Thermocouple	Type J KIT

Part No.	Description	Notes
----------	-------------	-------

**DIRECT****Fire Components**

117-199	Flame Rod	Rupp RS1032
117-205	Spark Rod	Rupp SR5106
117-404	Amplifier Rectification	Same as R7847A1033
2E462	Air Pressure Switch	0.5 - 12" W.C. Range
90-18117	Flame Rod	7" Length
90-23739	Spark Igniter	1.5" Gap
C645A1030	Low Pressure Switch	3.0" - 21.0" W.C.
C645B1047	High Pressure Switch	3.0" - 21.0" W.C.
Q652B 1006	Ignition Transformer	120Vac Input / 14KV Output
ST7800A1039	Purge Timer 30s	(RM4895) replaces 117-674
SV311A02N6CF5	Pilot Valve	ASCO 3/8" Inlet

**Maxitrol**

117-010	Signal Conditioner	A200
117-012	Amplifier	A1014
117-019	Sensor	TS114
117-021	Sensor	TS114B
117-032	Remote Selector	TD114
117-034	Remote Selector	TD114B
117-049	Remote Selector	TD294E-609-0818

**Power Flame Components**

117-121	Ignition Transformer	I1-A06-SA6
117-122	Ignition Cable	I1-GTO-15
117-123	Control Module	CM101/KDI Gas Train
117-131	Valve Proving Module	VPS 504
117-328	High Temp. Limit Control	Open Type
117-403	Amplifier Flame	8 SEC, R7847A-1025
117-404	Flame	2 OR 3 SEC, R7847A-1033
117-471	Power Supply Module	61-3356 FIREYE
117-492	Gauge Pressure	0-15 IN.
117-508	Pilot Igniter Tip	4027-01-T2425
117-509	Spark Plug	10MM - R240-2465
117-511	Auburn Flame Rod	FRS 4-6,13093-3
117-516	Eclipse Spark Plug	13047-1
117-517	Auburn Spark Igniter	I-25-3, 17652
17101	Air Switch	Antunes SPDT
20245	Pilot Valve	1/4" 120VAC
32000	Ignit. Transformer	120/6000V
39070	Item Controller MPS	Indirect Fire
555200	Schrack Relay	For Proof of Closure Switch, Replaces 55462, 55453

Part No.	Description	Notes
<b>PNEUMATICS</b>		
<b>Actuators &amp; Components</b>		
36267	Interlock	Ecomony Spray Gun Interlock
117-588	Valve	FM 120V .25 NPT 8040H7
117-599	Valve	JSF821435C, ASCO,120V, 60HZ
117-600	Solenoid Vent	V4297S-1003 For Small Valve Body
117-611	Valve Blocking Body	V5097A-1004
117-613	Valve Block Actuator	V4055A-1007
117-614	Valve Block Actuator	4055A-1031
117-615	Valve Block Actuator	V4055D-1035
238-635	Pulse Valve	Pulse 1.0 THD Comp. Fitting
238-708	Diaphragm Kit	1" Pulse Valve
238-718	Pulse Valve	1.0 with Pilot Control 120
242-019	Air Solenoid Valve	1/2" 3-Way Valve with Muffler
242-110	Actuator Air Damper	24V Floating
242-120	Actuator Air Damper	120V Spring Return
242-124	Air Solenoid Valve	3/4" 3-Way Valve (vented) 120V Coil, N.C UL .75 FPT
242-200	Valve	JSF-8210-G2 120V .5 (117-598)
242-425	Actuator Modulating	
8210G15	Air Solenoid Switch	24 Vac 1/2" NPT
AF24-SR	Direct Drive "Spring Return"	24 Vac & 2-10V DC for Burner
NM24	Direct Drive "Floating"	24 Vac for Cabin Pressure
NM24-MFT	Blemo Actuator	24 Vac, 1.3W, 3.5VA, CSA/UL Approved
S1 - DALLAS	Belimo Auxiliary SW.	(SM24) Obsolete use: 242-110
SGF24	Positioner Dial (AF Series)	Input 24 Vac - Output 0-10Vdc
SN1	Auxiliary Switch (NM Series)	01ea Single Pole Double Throw
SN2	Auxiliary Switch (NM Series)	02ea Single Pole Double Throw

**Pneumatic Components & Accessories**

242-179	Photohelic Gauge	Range .5-0-.5 W.C .
4ZK76	Regulator / Filter	All Applications
650-003	Pneumatic On/Off System	
NVFS1120-9DZ	SMC Electric Valve	24 Vac-Remote Located
V6EPB-B-S-LF	Flow Switch	(Inline) SPDT .18-2.7 SCFM
XH-9878	Gradual Switch	Operates Pneumatic Motor
XH-9879	Pneumatic Drive Motor	8 - 13 PSI Range

**VFDs (AUTOMOTIVE)**

134-500	230 Volt Drives	7.5 HP ATV31HU55M3X
134-501	230 Volt Drives	10 HP ATV31HU55M3X
134-502	230 Volt Drives	15 HP ATV31HU55M3X
134-503	460 Volt Drives	7.5 HP ATV31HU55M3X
134-504	460 Volt Drives	10 HP ATV31HU55M3X
134-505	460 Volt Drives	15 HP ATV31HU55M3X

Part No.	Description	Notes
<b>CONTROL PANELS:</b> UL 508 & CUL Listed - NEMA-1 Enclosure		
Includes panel mounted disconnect, magnetic motor starter with overloads, fused branch circuits, panel mounted controls, lighting transformer based on panel. For single motor systems. Some booths may require custom panels based on the fan configuration and number of motors. Standard panels for a maximum of 6 - 4		
CP1-11212	1HP	115V/60H 1 PH
CP1-12213	1HP	220V/60H 1 PH
CP1-12034	1HP	208V/60H 3 PH
CP1-12333	1HP	230V/60H 3 PH
CP1-12334	1HP	231V/60H 3 PH
CP1-14833	1HP	460V/60H 3 PH
CP1-14834	1HP	460V/60H 3 PH
CP1-15733	1HP	575V/60H 3 PH
CP1-15734	1HP	575V/60H 3 PH
CP1-21212	1.5HP	115V/60H 1 PH
CP1-22213	1.5HP	220V/60H 1 PH
CP1-22034	1.5HP	208V/60H 3 PH
CP1-22333	1.5HP	230V/60H 3 PH
CP1-22334	1.5HP	230V/60H 3 PH
CP1-24833	1.5HP	460V/60H 3 PH
CP1-24834	1.5HP	460V/60H 3 PH
CP1-25733	1.5HP	575V/60H 3 PH
CP1-25734	1.5HP	575V/60H 3 PH
CP1-21212	2HP	115V/60H 1 PH
CP1-22213	2HP	220V/60H 1 PH
CP1-22034	2HP	208V/60H 3 PH
CP1-22333	2HP	230V/60H 3 PH
CP1-22334	2HP	230V/60H 3 PH
CP1-24833	2HP	460V/60H 3 PH
CP1-24834	2HP	460V/60H 3 PH
CP1-25733	2HP	575V/60H 3 PH
CP1-25734	2HP	575V/60H 3 PH
CP1-31212	3HP	115V/60H 1 PH
CP1-32313	3HP	230V/60H 1 PH
CP1-32034	3HP	208V/60H 3 PH
CP1-32333	3HP	230V/60H 3 PH
CP1-32334	3HP	230V/60H 3 PH
CP1-34833	3HP	460V/60H 3 PH
CP1-34834	3HP	460V/60H 3 PH
CP1-35733	3HP	575V/60H 3 PH
CP1-35734	3HP	575V/60H 3 PH
CP1-52034	5HP	208V/60H 3 PH
CP1-52313	5HP	230V/60H 1 PH
CP1-52333	5HP	230V/60H 3 PH
CP1-52334	5HP	230V/60H 3 PH
CP1-54833	5HP	460V/60H 3 PH
CP1-54834	5HP	460V/60H 3 PH
CP1-55733	5HP	575V/60H 3 PH
CP1-55734	5HP	575V/60H 3 PH
CP1-72034	7.5HP	208V/60H 3 PH
CP1-72333	7.5HP	230V/60H 3 PH
CP1-72334	7.5HP	230V/60H 3 PH
CP1-74833	7.5HP	460V/60H 3 PH
CP1-74834	7.5HP	460V/60H 3 PH
CP1-75733	7.5HP	575V/60H 3 PH
CP1-75734	7.5HP	575V/60H 3 PH
CP1-102034	10HP	208V/60H 3 PH
CP1-102333	10HP	230V/60H 3 PH
CP1-102334	10HP	230V/60H 3 PH
CP1-104833	10HP	460V/60H 3 PH
CP1-104834	10HP	460V/60H 3 PH
CP1-105733	10HP	575V/60H 3 PH
CP1-105734	10HP	575V/60H 3 PH

**CONTROL PACKAGES:** Includes fused disconnect with fuses, motor starter with overloads & 120 volt control coil, push button motor air solenoid valve with 120 volt coil, and 120 or 277 volt light switch booths may require multiple control packages based on the fan c

Part No.	Description	Notes
CP-101151	1HP	115V/60HZ 1PH
CP-102301	1HP	220V/60HZ 1PH
CP-102083	1HP	208V/60HZ 3PH
CP-102303	1HP	230V/60HZ 3PH
CP-104603	1HP	460V/60HZ 3PH
CP-105753	1HP	575V/60HZ 3PH
CP-151151	1.5HP	115V/60HZ 1PH
CP-152301	1.5HP	220V/60HZ 1PH
CP-152083	1.5HP	208V/60HZ 3PH
CP-152303	1.5HP	230V/60HZ 3PH
CP-154603	1.5HP	460V/60HZ 3PH
CP-155753	1.5HP	575V/60HZ 3PH
CP-201151	2HP	115V/60HZ 1PH
CP-202301	2HP	220V/60HZ 1PH
CP-202083	2HP	208V/60HZ 3PH
CP-202303	2HP	230V/60HZ 3PH
CP-204603	2HP	460V/60HZ 3PH
CP-205753	2HP	575V/60HZ 3PH
CP-301151	3HP	115V/60HZ 1PH
CP-302301	3HP	220V/60HZ 1PH
CP-302083	3HP	208V/60HZ 3PH
CP-302303	3HP	230V/60HZ 3PH
CP-304603	3HP	460V/60HZ 3PH
CP-305753	3HP	575V/60HZ 3PH
CP-501151	5HP	115V/60HZ 1PH
CP-502301	5HP	230V/60HZ 1PH
CP-502083	5HP	208V/60HZ 3PH
CP-502303	5HP	230V/60HZ 3PH
CP-504603	5HP	460V/60HZ 3PH
CP-505753	5HP	575V/60HZ 3PH
CP-752083	7.5HP	208V/60HZ 3PH
CP-752303	7.5HP	230V/60HZ 3PH
CP-754603	7.5HP	460V/60HZ 3PH
CP-755753	7.5HP	575V/60HZ 3PH
CP-X2083	10HP	208V/60HZ 3PH
CP-X2303	10HP	230V/60HZ 3PH
CP-X4603	10HP	460V/60HZ 3PH
CP-X5753	10HP	575V/60HZ 3PH

**PRICING NOTE:**

Applications with multiple fans/motors up to and including 4 motors – each motor
Applications with more than one AMU and electric requirements of 208 volts
Lighting transformer for 7 - 40 lights on 3 wire electrical systems
No transformer needed for 4 wire systems
Lighting contactor and fuses for 7 - 40 lights on all systems

Part No.	Description	Notes
<b>NON ELECTRICAL COMPONENTS</b>		
<b>Pneumatic Components</b>		
122-800	Camozzi (Coil) Cap	For Electrical Connections
1411-04-NT	Nylon Hose 100' Roll	.25" O.D. / .18" I.D.
2000-0	Magnahelic Gage	0 - 0.5" W.C. with Mount Kit
242-001	Manometer (Draft Gauge)	neg.05 to 3" W.C. with Mount Kit (Same as DF-483 & 242-054)
242-003	Tube Kit	Dwyer A-602
242-005	Static Pres. Tip	For .25 Steel Tube
242-007	Tubing Polyethylene	.250 OD .170 ID, Sold by the Foot
242-024	Solenoid Pilot	120V/60HZ, .125 FPT
242-038	Magnehelic Gauge	Range 0-1
242-166	Oil Red 3/4 oz.	For Manometer (Same as A-101)
242-236	Muffler Exhaust Port	.75 Pneumatic, Sintered Brass Muffler
358-015 KIT	Camozzi Air Valve Kit	(-02) Fittings and Adapters
358-015B	Camozzi Air Valve	24Vac - Remote Located, Body Only
358-990N	Camozzi Manual Valve	5-way 2-Position Maintained
39079	Grey Nipple	For Hose Connection in Cabin
410-21-120VAC	Camozzi Electric Valve	120Vac - Solenoid Included
6560-04-00	Camozzi Connector	1/4" Hose "Y" Coupler
6590-04-00	Camozzi Connector	1/4" Bulkhead Union
7A50005	Camozzi Cylinder	40M-2L040-A0300 12" Stroke Clevis & Flow Controls Incl.
9EL0125	Camozzi Electric Valve	24Vac - Mounted on Cylinder
9GR9016	Camozzi Cylinder	24S2A25A100S04 4" Stroke Clevis & Flow Controls, Mechanical End Stops
A7B 24V	Camozzi Coil 24Vac	Fits <b>only</b> Camozzi Valves
GA-9706	Magnahelic Gage	"Paint Zone" with Mount Kit

**Other Components**

20450	J-30 Diffuser	with Hardware
37076	Heat Exchanger	1 Million BTU Capacity
39096	Sight Glass Assembly	Glass, Gaskets, Hardware (Indirect)
05412	Burner Motor	J30 & J50
37076G	Heat Exchanger Gasket	Square w/2 Holes (1 & 1.5MBTU)
37076HC	Heat Exchanger	1.5 Million BTU Capacity
37076RG	Heat Exchanger Gasket	Round (1 & 1.5MBTU)
39108	Sight Glass	with 2 Gaskets (Direct)
CR1-OS	Powerflame Burner	Oil Burner 1M BTU
F30031	Nat. Gas Pilot Assy.	Flm. Rod & Electrode Incl.
F30050	LP Gas Pilot Assy.	Ultra Violet (Scanner not included)
J20471	J-50 Diffuser	with Hardware
J30A-10	Powerflame Burner	Nat. Gas/LP 1M BTU 55" x 48" x 38", 200 lb
J50A-15	Powerflame Burner	Nat. Gas/LP 1.5M BTU
M11010	Orifice	J30 LP Gas 1/2"
M11012	Orifice	J30 Nat Gas 5/8"
X04210	Ignition Electrode	J30 & J50 (for LP & Natural Gas)
X04225	Flame Rod	J30 & J50 (for Natural Gas)

Part No.	Description	Notes
----------	-------------	-------

**MISCELLANEOUS OVEN COMPONENTS*****Gaskets***

248-035	Tadpole	1/2" X 1 1/2" Tail (248-029), per Ft.
248-227	Tadpole	3/4" Seal, 2" Width
248-107	Seal Tape	.125 X 3.0 W, Fiberglass
260-109	Roll	Roll Vellumoid Segalite, per Ft
260-142	Paper	Burner 970F Unifrax Paper, per Ft
260-143	Paper	Burner 970J Unifrax Paper, Square Ft.

***Flame Rod***

260-193	Flame Rod	For J83-DS 645700
260-194	Flame Rod	For J81A/J121A 641800

***Burner Inserts***

450-001	Assembly	2.0 X 6.0
450-002	Assembly	4.0 X 4.0
450-003	Assembly	1.0 X 6.0
450-006	Assembly	.5 X 6.0
450-004	Housing	4 X 4
450-005	Housing	2.0 X 6.0

***Burner Tube***

BT-18-7	Burner Tube	18"L X 7"H X 15.5"W
BT-18-9	Burner Tube	18"L X 9"H X 15.5"W
BT-24-7B	Burner Tube	24"L X 7"H X 10.5"W Baby
BT-36-7	Burner Tube	36"L X 7"H X 15.5"W
BT-36-9	Burner Tube	36"L X 9"H X 15.5"W
BT-6-7B	Burner Tube	6"L X 7"H X 10.5"W Baby
BT-EC-7	Burner Tube	End Cap 7"H X 15.5"W
BT-EC-7B	Burner Tube	End Cap 7"H X 10.5"W Baby
BT-EC-9	Burner Tube	End Cap 9"H X 15.5"W

***Oven Ductwork***

501-181	Pyrostack	18" OD Weather collar
501-182	Pyrostack	18" OD X Roof flashing
501-183	Pyrostack	18" OD X 48" Long
501-184	Pyrostack (No Loss)	18" OD X 48" Long No loss rain cap
501-185	Damper	18" OD Barometric damper
501-221	Pyrostack	22" OD Weather collar
501-222	Pyrostack	22" OD X Roof flashing
501-223	Pyrostack	22" OD X 48" Long
501-224	Pyrostack (No Loss)	22" OD X 48" Long No loss rain cap
501-225	Damper	22" OD Barometric damper
501-501	Steel	18" OD Afterburner mild steel
501-507	Steel	22" OD Afterburner mild steel

<b>Part No.</b>	<b>Description</b>	<b>Notes</b>
<b><i>Miscellaneous</i></b>		
117-444	Chart Recorder	1 Pen
117-447	Recorder Paper	V24001660-005
117-448	Chart Recorder Pen	Red Recorder Pen (ea.) - Sold as 6 Pk
117-449	Chart Recorder Pen	Purple Recorder Pen (ea.)- Sold as 6 PK
117-453	Recorder Pen	Red Partlow Recorder Pen 60500402
221-213	Clip Washer	2-1/2" Squared 10 Gauge Galvanized
221-214	Stud Insulation	Weld Pin 4.5"
221-216	Stud Insulation	Weld Pin 5.0 Inch
238-1020	Nozzle	FOG 3/8-GG-SS-17W
238-1021	Nozzle	FOG 1/4-GG-SS-12W
238-1022	Nozzle	FOG 1/8-GG-SS-2.8W
238-1027	Nozzle	.125 Fog H-1/8-VV-SS-9503
248-033	Duraboard	.5 IN 24 X 48 each
248-120	Mineral Wool	8# Den 2 X 24 X 48, Square Ft
S7800A1001	Key Board Display	Formally Blu-Surf (117-666)

Part No.	Description	Notes
----------	-------------	-------

**LIGHTING****Ballast**

230-032	Ballast	120V/40W STD T-12, 1289
230-127	Ballast	120V/32W T-8 1744
230-170	Ballast	Emergency 120/277V
ICN3P32SC	Ballast (Advanced)	120V/277V For 6 Tube 32W T-8
ICN4P32SC	Ballast (Advanced)	120V/277V For 4 Tube 32W T-8
QTP3X32T8	Ballast (Sylvania)	120V/277V For 6 Tube 32W T-8
QTP4X32T8	Ballast (Sylvania)	120V/277V For 4 Tube 32W T-8
L-140F-TP	Ballast	120V For (1) Neon Tube (36 - 40W)
R-2S34-TP	Ballast 120V	For (2) Neon Tubes 40W

**Bulbs & Tubes**

51305300	Tube - Neon	TLD 36W/54 T8 25 per Case
111-076	Control Panel Bulb	Pilot Lamp, 120 Volt (Same as DL1CE130)
111-077	Control Panel Bulb	Pilot Lamp, 24 Volt (Same as DL1CE024)
230-082	Bulb	Incandescent 120V/150W
230-100	Bulb	Incandescent 120V/100W (Oven)
230-147	Bulb	Incandescent 120V/300W Standard Base
230-227	Bulb	75W/120V, Used with Incandescent Lights
230-281	Tube Fluorescent	32W T-8 Alto (F32T8/TL850) 30/Case [Case lots only]
230-283	Tube - Neon	F40C50 40W T-12 (24683-0) 30/Case
F32T8/TL950	Tube - Alto	32 W T-8 98CRI / 2000 L / 5000K, 25/Case

**Light Fixtures**

600-001	Ceiling Mount	Incandescent 150-300W, Dome Style
600-002	Wall Mount	Incandescent with Dome 150-300W
600-006	Ceiling Mount	Incandescent with Angle 150-300W
LAC12-4	Corner Lights	4 Tube Fixture (1 each)
LAC12-6	Corner Lights	6 Tube Fixture (1 each)
230-160	Explosion Proof	2 Lamp, 4 Ft 120V/60W 60HZ
230-162	Explosion Proof	4 Lamp 4 Ft 120V/40W 60HZ
230-180	Explosion Proof	4 Lamp 4Ft 277V/40W 60HZ
230-181	Explosion Proof	4 Lamp 4 Ft 120V/60W 60HZ
230-306	Inside Access	2 Lamp T8 4 Ft, Slim Light 120V/32W
230-308	Inside Access	4 Lamp T8 4 Ft, Slim Light 120V/32W
230-400	Inside Access	2 Lamp T8 3 Ft, Slim Light 120V/25W (230-300)
230-405	Inside Access	4 Lamp T8 3 Ft, Slim Light 120V/25W
230-501	Inside Access	4 Tube, 4Ft with Bulbs & Whips 120V (230-328 & 230-500)
LABW12-4	Inside Access	4 Tube with Bulbs & Glass 120V (LFMK4-120/277)
LABW12-6	Inside Access	6 Tube with Bulbs & Glass 120V (LFMK6-120/277)
LAR12-6	Inside Access	6 Tube For Dual Skin Panel (Replaces LFK120-6)
230-183	Rear Access	4 Lamp 4 Ft 120V/60W 60HZ, T-12
230-551	Rear Access	4 Tube, 4Ft with Bulbs & Whips 120V (230-343 & 230-550)
230-065	Wall Mount	Vapor Tight 120/277V

Part No.	Description	Notes
<b><i>Other Lighting Componentets</i></b>		
BS616	Bolt	6 X 20mm for Light Cover (6mm)
230-006	Glass - Tempered	.1875 X 15 X 53 Square Corners
GL-9704	Glass - Tempered	19.5" X 49.5" X 4MM (Ea. Piece of Glass)
GF-4	Glass & Frame	For LFK -4 S.S.
GF-6	Glass & Frame	For LFK -6 D.S.
SS-00754-K25	Glass Clips	25 per Box
9070T150D55	Isolation Control	Xmtf Isolation Control 120V
SS-37755	Lamp Holder	(Vossloh)
230-034	Lamp Holder	with Spring
230-035	Lamp Holder	Fixed
230-004	Light Peel Off Cover	18", 100 Ft. per Roll
230-210	Light Peel Off Cover	12", 100 Ft. per Roll
230-211	Light Peel Off Cover	Dispenser Handle
DVA-5083-K5	Light Peel Off Cover	Clear View Glass Shield 48" X 18" (5 Sheets)
230-165	Mounting Bracket	Ceiling/Wall, XP 2-Lamp
39410	Neon Tube Holder	Snap Type
PRX8100	Proximity Actuator	Mounted on Glass Cover
PRX8200	Proximity Sensor	Mounted on Light Fixture
FS-4X	Starter	For (1) 36-40W Tube
KK-WHAB9-12	Wiring Harness	Booth 12 Lights
KK-WHAE9-2	Wiring Harness	Booth Extension 2 Lights
KK-WHPMR-2	Wiring Harness	Mix Room 2 Lights
KK-WHPRP-8	Wiring Harness	Prep 8 Lights



Part No.	Description	Notes
----------	-------------	-------

**EXPLOSION PROOF MOTORS****Single Phase**

MX003-TV1-0056	1/3HP T-V	56FR, Replaces MO-5284, 234-033
MX005-DV1-0056	1/2HP D-V	56FR, Replaces MO-5393, 234-034
MX007-DV1-0056	3/4HP D-V	56FR, Replaces MO-5493, 234-035
MX010-DV1-0056	1HP D-V	56FR, Replaces 234-036
MX020-DV1-182T	2HP D-V	182TFR

**Three Phase**

MX003-TV3-0056	1/3HP T-V	56FR, Replaces 234-021
MX003-573-0056	1/3HP 575V	56FR
MX005-573-0056	1/2HP 575V	56FR, Replaces MO-5395
MX005-TV3-0056	1/2HP T-V	56FR, Replaces MO-5394, 234-022
MX007-573-0056	3/4HP 575V	56FR
MX007-TV3-0056	3/4HP T-V	56FR, Replaces MO-5494, 234-023
MX010-573-0056	1HP 575V	56FR, Replaces MO-6081
MX010-TV3-0056	1HP T-V	56FR, Replaces 234-024
MX020-573-145T	2HP 575V	145TFR, Replaces MO-6280
MX020-TV3-145T	2HP T-V	145TFR, Replaces MO-6285, 234-027
MX030-573-182T	3HP 575V	182TFR, Replaces MO-6379
MX030-TV3-182T	3HP T-V	182TFR, Replaces MO-6378, 234-028
MX050-573-184T	5HP 575V	184TFR, Replaces MO-6479
MX050-DV3-184T	5HP D-V	184TFR, Replaces MO-6478, 234-029
MX075-573-213T	7.5HP 575V	213TFR, Replaces MO-6579, 234-089
MX075-TV3-213T	7.5HP T-V	213TFR, Replaces MO-6578, 234-030
MX100-573-215T	10HP 575V	215TFR, Replaces MO-6679, 234-090
MX100-DV3-215T	10HP D-V	215TFR, Replaces MO-6678, 234-031

**FAN MOTOR COVER :**

Weather tight, ventilated enclosure designed to protect the electric fan motor when installed outside. Constructed from galvanized steel and requires some assembly.

410-001	12"	Motor Cover
XH-9070	18"	Motor Cover for GFA Models Only
XH-9071	24"	Motor Cover for GFA Models Only
410-009	30"	Motor Cover
XH-9072	34"	Motor Cover for GFA Models Only
410-010	36"	Motor Cover
XH-4090	40"	Motor Cover for GFA Models Only
410-006	42"	Motor Cover
410-007	48"	Motor Cover

Part No.	Description	Notes
<b>OTHER</b>		
39075	10 HP Lafert	230/460V Wye, Delta Metric Ft Mount
117-527	Control Motor	90 Degree Stroke 30 SEC
234-499	7.5 HP	208-460 IEC F-M D/T Special Drilled & Tapped Shaft (Replaces MM3710)
234-500	10 HP Baldor	230/460V Metric Ft. Mount (Special), Drilled & Tapped Shaft (Replaces MM3714 & 39075)
242-193	Modutrol Motor	120V Modulating
260-203	1/2 HP Blower Motor	1PH, 56C-Face, 110/208-230 V 60HZ Drip Proof
260-204	Motor	For J81 & J83 646400
260-205	Motor	For J121-A3 644350
39074	7.5 HP Lafert	230/460V Wye, DeltaMetric Ft Mount.
9MO0454	7.5 HP Lafert	230/460V C-Face Nema
9MO0464	10 HP Lafert	230/460V C-Face Nema
MOD-230513	5 HP Baldor	2 Speed, 2 Winding 230V
VM2333T	15 HP	230/460 C-Face
VM3700G1	10 HP	1725 RPM TEFC 215 TC Nema C-Face, No Base
VM3714T	10 HP Baldor	230/460V



Part No.	Description	Notes
<b>36 Inch</b>		
TAB-36-10	1HP	Variable Pitch 29" H X 39.63" (OD)
TAB-36-20	2HP	
TAB-36-30	3HP	
TAB-36-50	5HP	
TAB-36-75	7.5HP	
<b>40 Inch</b>		
GFA-40VP-050	5HP	Variable Pitch 30" H X 43" (OD), Includes Sheaves and Belts (Replaces MFA-40)
GFA-40VP-075	7.5HP	
GFA-40VP-100	10HP	
<b>42 Inch</b>		
TAB-42-20	2HP	Variable Pitch 30" H X 45.75" (OD)
TAB-42-30	3HP	
TAB-42-50	5HP	
TAB-42-75	7.5HP	
TAB-42-100	10HP	
<b>48 Inch</b>		
TAB-48-20	2HP	Variable Pitch 33" H X 52.75" (OD)
TAB-48-30	3HP	
TAB-48-50	5HP	
TAB-48-75	7.5HP	
TAB-48-100	10HP	
<b><i>Turbo Fans/Cones</i></b>		
39028	7.5 HP Nema Shaft Fan	Hub Size is 1 3/8"
39029	10 HP Nema Shaft Fan	Hub Size is 1 3/8"
39030	7.5 HP Metric Shaft Fan	Hub Size is 1 4/8"
39031	10 HP Metric Shaft Fan	Hub Size is 1 4/8"
39031C	Cone/Shroud	18 x 27 Dischg - 7.5 & 10 HP fans
9VE0269	15 HP Nema Shaft Fan	1-5/8" Hub
9VE0278	15 HP Shroud	
<b><i>Mix Room Fans</i></b>		
4C831	Fan	1210 cfm 8.6Amps
BLR-409	Delhi Blower	
MPK1000	Pressurizing Kit	
206-260	Wheel Blower	.25 HP 1PH, 120/230V

Part No.	Description	Notes
<b>FAN ASSEMBLIES</b>		
<i>Fan Blades Only</i>		
216-700	Fan Blade	TAB-18 Greenheck Fan
216-702	Fan Blade	TAB-24 Greenheck Fan
216-703	Fan Blade	TAB-30 Greenheck Fan
216-704	Fan Blade	TAB-36 Greenheck Fan
216-705	Fan Blade	TAB-42 Greenheck Fan
30-418	Fan Blade	18"
30-424	Fan Blade	24"
30-434	Fan Blade	34"
<i>Fan Blades Only</i>		
30-442	Fan Blade	42"
FBA-17	17.5" Fan Blade Assembly	5 Blades incl. Bushing
FBA-24	24" Fan Blade Assembly	5 Blades incl. Bushing
FBA-34	34" Fan Blade Assembly	7 Blades incl. Bushing
FBA-40	40" Fan Blade Assembly	7 Blades incl. Bushing
FBA-48	48" Fan Blade Assembly	4 Blades (Replaces JL-495)
GFB-18	18" Fan Blade Assembly	10 Blades, New Style (FB-1780-10B)
GFB-24	24" Fan Blade Assembly	10 Blades, New Style (FB-2375-10B)
GFB-34	34" Fan Blade Assembly	7 Blades, New Style (FB-3365-7B)
GFB-40	40" Fan Blade Assembly	7 Blades, New Style (FB-3960-7B)
FBUA-24S	24" Fan Blade Assy.	Smaller Diameter
JK484	42" Fan Blade Assembly	4 Blades
<i>Fan Bushings</i>		
TBG-158	5/8" Bushing	Used on FBA 17
TBG-937	5/16" Bushing	Used on FBA 24
TBG-125	1-1/6" Bushing	Used on FBA 34, FBA 40
213-081	SH X 1.00 TB Woods	
213-445	SDSX1	
<i>Bearing, Shaft &amp; Pulley Assemblies</i>		
JF-4688-3	17.5"	Bearing, Shaft & Pulley Assembly
JH-1824	18" & 24" New Style 2004	GFA Bearing, Shaft & Pulley Assembly (JH-2425)
JH-4193-2	24"	Bearing, Shaft & Pulley Assembly
JJ-4041	40" New Style 2004	GFA Bearing, Shaft & Pulley Assembly
JJ-3413	34" New Style 2004	GFA Bearing, Shaft & Pulley Assembly
JJ-4214-2	34"	Bearing, Shaft & Pulley Assembly
JJ-4214-3	40"	Bearing, Shaft & Pulley Assembly
JK-4217-1	42" & 48"	Bearing, Shaft & Pulley Assembly

Part No.	Description	Notes
<b><i>Bearings</i></b>		
20-2370	Bearings	For 18" Fan (2 Required)
20-2371	Bearings	For 24" Fan (2 Required)
20-2372	Bearings	For 34" & 42" Fan (2 Required)
213-600	Bearings	1" Greenheck Fan
213-601	Bearings	1 1/4" Greenheck Fan
213-602	Bearings	1 1/2" Greenheck Fan
213-603	Bearings	1 3/4" Greenheck Fan
30-120	Bearing Spacer	(Formally Binks)
30-122	Bearing Housing	24" (Formally Binks)
30-123	Bearing Housing	34" (Formally Binks)
30-32	Bearing Housing	(Formally Binks)

<b><i>Belts</i></b>		
BT-170	For 17" diameter fan	37" Length
BT-240	For 24" diameter fan	49" Length
BT-242	For 24" diameter fan	52" Length
BT-248	B45 Belt	48" Length
BT-251	B48 Belt	51" Length
BT-340	For 34" diameter fan	64" Length
BT-342	For 34" diameter fan	66" Length
BT-400	For 40" diameter fan	71" Length
BT-401	For 40" diameter fan	74" Length

*For additional Belts, Pulley's and Sheaves, contact GFS for pricing and availability.*

<b><i>Shafts</i></b>		
213-609	Shaft	For 18", Greenheck
213-610	Shaft	For 20", Greenheck
213-611	Shaft	For 24", Greenheck
213-612	Shaft	For 30", Greenheck
213-613	Shaft	For 36" & 42", Greenheck
213-614	Shaft	For 48", Greenheck
30-1119	Shaft	
30-16	Shaft	For 18" Fan (Formally Binks)
30-199	Shaft	For 48" Fan (Formally Binks)
30-328	Shaft	24"
30-329	Shaft	34"
30-330	Shaft	42"
30-1120	Shaft Assembly	Includes 2 Bearings

Part No.	Description	Notes
<b>MISCELLANEOUS FAN COMPONENTS</b>		
30-13	Snap Ring	For 18" Fan (2 Required)
30-14	Snap Ring	For 24" Fan (2 Required)
30-15	Snap Ring	For 34" & 42" Fan (2 Required)
30-21	Fan Bolt	(Formally Binks)
30-62	1/4" Key	
30-63	1/8: Key	
30-94	1/4" Key	1-1/2" Length for Fan

***Fan Support Frame/Fan Stand***

For Flat or Pitched Roof Outdoor roof-mounted unit specifically designed to support the exhaust fan and connected exhaust stack. Global recommends using one for all outdoor roof-mounted exhaust fans. Constructed from angle iron and requires some assembly.


408-001	12" Wide	Flat Roof
JF-9018	18" Wide	Flat Roof
JH-9000	24" Wide	Flat Roof
408-004	27" Wide	Flat Roof
408-018	30" Wide	Flat Roof
JJ-434	34" Wide	Flat Roof
408-015	36" Wide	Flat Roof
JJ-440 ✓	40" Wide	Flat Roof
408-006	42" Wide	Flat Roof
408-007	48" Wide	Flat Roof

**GFS FAN PERFORMANCE CHART**

Model No. (Less Motor)	HP	RPM	Free Air	0.125"	.25"	0.375"	0.5"	0.75"	1.0"	1.25"	Replacement Kits	
<b>18 Inch</b>												
GFA-18VP-003	1/3	1228 - 1332	2610 - 2831	2082 - 2419	1304 - 1608	--	--	--	--	--	GFB-18 <i>Kit includes: Fan Blade, Tapered Bushing and Ruff Key</i>	JH-1824 <i>Kit Includes: Fan Hub, Pulley and Bushing</i>
GFA-18VP-005	1/2	1437 - 1541	3054 - 3275	2748 - 2989	1940 - 2282	1430 - 1703	--	--	--	--		
GFA-18VP-007	3/4	1437 - 1854	3054 - 3941	2748 - 3701	1940 - 3326	1430 - 2686	*1618 - 2187	--	--	--		
GFA-18VP-010	1	1593 - 2116	3386 - 4498	3109 - 4289	2461 - 4081	1857 - 3570	*1748 - 3021	*1700 - 2231	--	--		
GFA-18VP-020	2	2116 - 2638	4498 - 5607	4289 - 5440	4081 - 5273	3570 - 5106	3021 - 4754	2231 - 3851	*2833 - 3140	--		
<b>24 Inch</b>												
GFA-24VP-010	1	1437 - 1541	5691 - 6102	5487 - 5929	5142 - 5610	4796 - 5288	*4353 - 4966	*3866	--	--	GFB-24	JH-2425
GFA-24VP-020	2	1593 - 2011	6308 - 7964	6140 - 7831	5842 - 7669	5531 - 7422	5334 - 7175	*4225 - 6681	*4621 - 6019	*4294 - 5141		
GFA-24VP-030	3	1802 - 2220	7136 - 8791	6988 - 8671	6763 - 8550	6487 - 8340	6212 - 8116	5601 - 7669	4621 - 7221	*4294 - 6545		
GFA-24VP-050	5	2116 - 2638	8379 - 10446	8253 - 10345	8120 - 10244	7885 - 10142	7650 - 9955	7180 - 9578	*6691 - 9201	*5856 - 8825		
<b>34 Inch</b>												
GFA-34VP-020	2	915 - 1044	11978 - 13667	11228 - 13009	10164 - 12326	8740 - 11119	*8558 - 9851	--	--	--	GFB-34	JJ-3413
GFA-34VP-030	3	979 - 1268	12816 - 16599	12114 - 16057	11248 - 15516	9943 - 14921	8276 - 13928	*10161 - 11860	--	--		
GFA-34VP-050	5	1108 - 1429	14504 - 18706	13885 - 18226	13265 - 17746	12232 - 17265	11063 - 16649	*10161 - 14878	*11459 - 12835	--		
GFA-34VP-075	7 1/2	1204 - 1622	15761 - 21233	15191 - 20810	14621 - 20386	13859 - 19963	12813 - 19540	10264 - 18239	*11459 - 16666	*13139 - 14959		
<b>40 Inch</b>												
GFA-40VP-050	5	915 - 1140	21163 - 26367	19811 - 25282	18374 - 24197	16364 - 23032	13626 - 21693	*15746 - 17392	--	--	GFB-40	JJ-4041
GFA-40VP-075	7 1/2	937 - 1242	21672 - 28726	20352 - 27730	18974 - 26734	17189 - 25738	14424 - 24553	*16665 - 21157	--	--		
GFA-40VP-100	10	1084 - 1389	25072 - 32126	23931 - 31326	22790 - 30345	21496 - 29454	19925 - 28561	15338 - 26364	*18278 - 22671	--		

5/21/2004

\* This represents the lowest possible cfm at a particular static pressure due to instability of the fan curve. The drive sheave cannot be set below a certain RPM for these ranges.

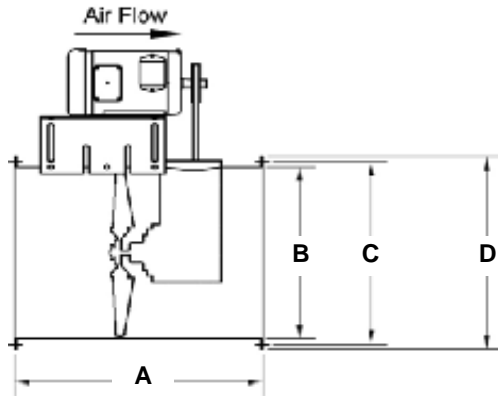


Model	A	B Inside Dimension	C Mounting Bolt Circle	D Outside Dimension
GFA-18	24"	18"	19 1/4"	20 1/2"
GFA024	24"	24"	25 1/2"	26 7/8"
GFA-34	30"	34"	35 3/4"	27"
GFA-40	30"	40"	41 3/4"	43"

Part No.	Description	Notes
----------	-------------	-------


**DUCT WORK**

**ROOF VENTILATOR:** Design provides automatic protection against rain, snow and backdrafts for the exhaust system spray booth and operator. All sizes constructed from galvanized steel and may require Connector Rings and some assembly. Indicate the number of rings and if rings are to be welded to roof ventilator or shipped loose.

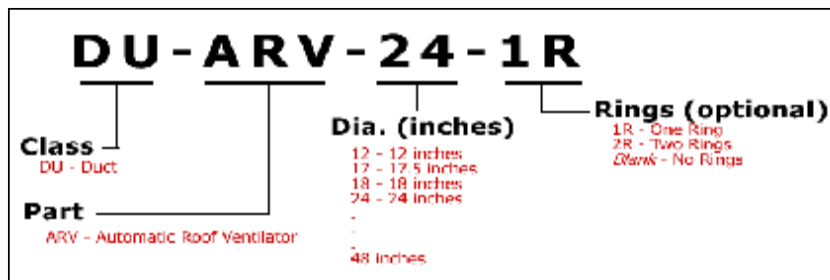

DU-ARV-12	12"	Less Connector Rings (Replaces 630-001)
DU-ARV-16	16"	Less Connector Rings
DU-ARV-17	17.5"	Less Connector Rings (Replaces XH-4725)
DU-ARV-18	18"	Less Connector Rings (Replaces 630-002)
DU-ARV-24	24"	Less Connector Rings (Replaces 630-003, XH-4726)
DU-ARV-27	27"	Less Connector Rings (Replaces 630-005)
DU-ARV-28	28"	Less Connector Rings
DU-ARV-30	30"	Less Connector Rings (Replaces 630-006)
DU-ARV-34	34"	Less Connector Rings (Replaces 630-007 & XH-4727)
DU-ARV-36	36"	Less Connector Rings (Replaces 630-008)
DU-ARV-40	40"	Less Connector Rings (Replaces XH-4030)
DU-ARV-42	42"	Less Connector Rings (Replaces 630-009)
DU-ARV-48	48"	Less Connector Rings (Replaces 630-010)


**ROOF FLANGES:** Not recommended for corrugated metal roofs. Global recommends a custom curb on a roof pitch that exceeds 4" on 12", specify pitch when ordering.

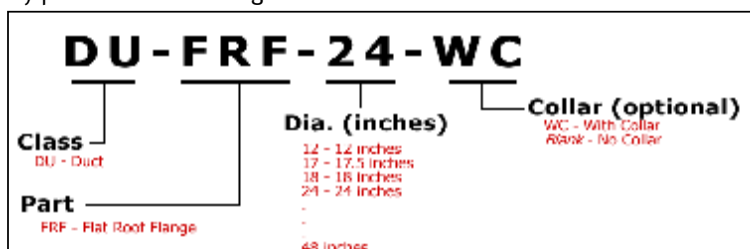

**Flat Roof Flange**

DU-FRF-12-WC	12"	Flat Roof Flange, with Collar (Replaces 401-008)
DU-FRF-18-WC	18"	Flat Roof Flange, with Collar (Replaces 401-009)
DU-FRF-20-WC	20"	Flat Roof Flange, with Collar
DU-FRF-24-WC	24"	Flat Roof Flange, with Collar (Replaces 401-010)
DU-FRF-27-WC	27"	Flat Roof Flange, with Collar (Replaces 401-011)
DU-FRF-30-WC	30"	Flat Roof Flange, with Collar (Replaces 401-034)
DU-FRF-34-WC	34"	Flat Roof Flange, with Collar (Replaces 401-012)
DU-FRF-36-WC	36"	Flat Roof Flange, with Collar (Replaces 401-091)
DU-FRF-40-WC	40"	Flat Roof Flange, with Collar
DU-FRF-42-WC	42"	Flat Roof Flange, with Collar (Replaces 401-013)
DU-FRF-48-WC	48"	Flat Roof Flange, with Collar (Replaces 401-014)

Part No.	Description	Notes
----------	-------------	-------

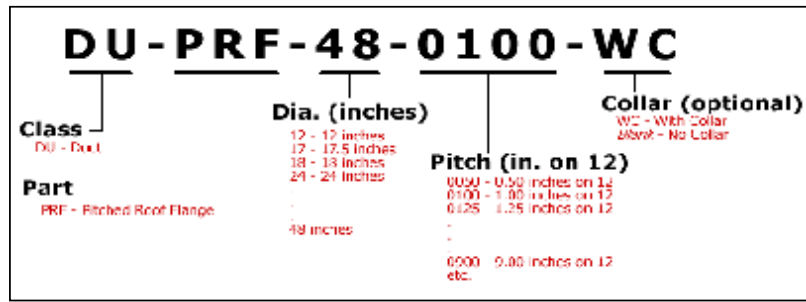


**Pitched Roof Flange**

DU-PRF-12-___-WC	12"	Pitched Roof Flange, with Collar (Replaces 401-001)
DU-PRF-18-___-WC	18"	Pitched Roof Flange, with Collar (Replaces 401-002)
DU-PRF-24-___-WC	24"	Pitched Roof Flange, with Collar (Replaces 401-003)
DU-PRF-30-___-WC	30"	Pitched Roof Flange, with Collar (Replaces 401-033)
DU-PRF-34-___-WC	34"	Pitched Roof Flange, with Collar (Replaces 401-005)
DU-PRF-36-___-WC	36"	Pitched Roof Flange, with Collar (Replaces 401-143)
DU-PRF-40-___-WC	40"	Pitched Roof Flange, with Collar
DU-PRF-42-___-WC	42"	Pitched Roof Flange, with Collar (Replaces 401-006)
DU-PRF-48-___-WC	48"	Pitched Roof Flange, with Collar (Replaces 401-077)

Indicate pitch (inches on 12) when ordering.

**EXHAUST DUCT**


**Plain Duct:** Straight 3' long section, with one end corrugated for easy installation. All sizes constructed from galvanized steel and require some assembly.

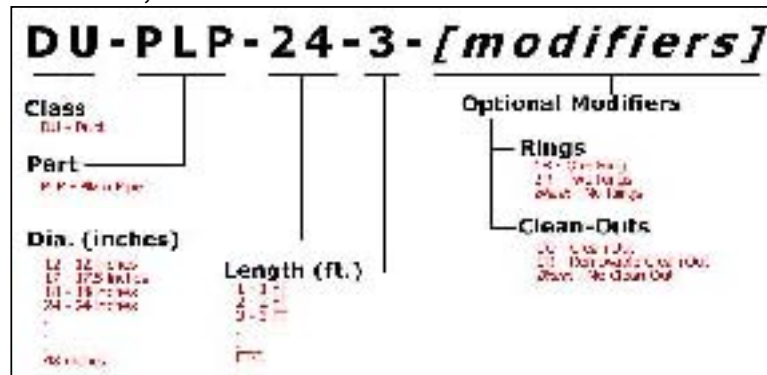

DU-PLP-12-3	12"	Less Access Door (Replaces 403-001)
DU-PLP-17-3	17.5"	Less Access Door
DU-PLP-18-3	18"	Less Access Door (Replaces 403-002)
DU-PLP-24-3	24"	Less Access Door (Replaces 403-003, XH-1499)
DU-PLP-27-3	27"	Less Access Door (Replaces 403-004)
DU-PLP-30-3	30"	Less Access Door (Replaces 403-037)
DU-PLP-34-3	34"	Less Access Door (Replaces 403-005, XH-60)
DU-PLP-36-3	36"	Less Access Door (Replaces 403-054)
DU-PLP-40-3	40"	Less Access Door (Replaces XH-4040)
DU-PLP-42-3	42"	Less Access Door (Replaces 403-006)
DU-PLP-48-3	48"	Less Access Door (Replaces 403-007)


Part No.	Description	Notes
<b>Plain Duct with Access Door:</b> Straight 3' long section with removable Access Door (CO) for inspection and cleaning. One end is corrugated for easy installation. (Universal Duct, is designed to be installed directly below (or prior to) the exhaust fan). All sizes are constructed from galvanized steel and require some assembly.		
DU-PLP-12-3-CO	12"	with Access Door (Replaces 403-008)
DU-PLP-17-3-CO	17.5"	with Access Door
DU-PLP-18-3-CO	18"	with Access Door (Replaces 403-009)
DU-PLP-24-3-CO	24"	with Access Door (Replaces 403-010, XH-4471)
DU-PLP-27-3-CO	27"	with Access Door (Replaces 403-011)
DU-PLP-30-3-CO	30"	with Access Door (Replaces 403-038)
DU-PLP-34-3-CO	34"	with Access Door (Replaces 403-012, XH-4472)
DU-PLP-36-3-CO	36"	with Access Door (Replaces 403-057)
DU-PLP-40-3-CO	40"	with Access Door (Replaces XH-4020)
DU-PLP-42-3-CO	42"	with Access Door (Replaces 403-013)
DU-PLP-48-3CO	48"	with Access Door (Replaces 403-014)

**Spiral Duct:** Sold by the foot, available in 2' to 8' lengths. All sizes constructed from galvanized steel, will require Connector Rings on each end (sold separately). Indicate the length, number of rings and if rings are to be welded to duct or shipped loose.

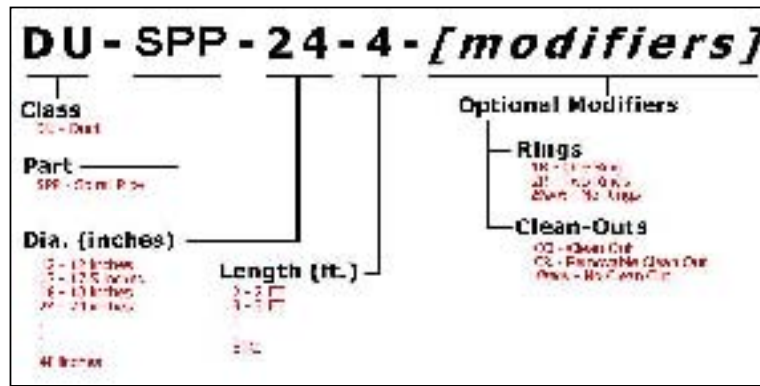

DU-SPP-12-__-__	12"	Less Access Door (Replaces 246-060)
DU-SPP-18-__-__	18"	Less Access Door (Replaces 246-069)
DU-SPP-24-__-__	24"	Less Access Door (Replaces 246-078, SP 24)
DU-SPP-30-__-__	30"	Less Access Door (Replaces 246-105)
DU-SPP-34-__-__	34"	Less Access Door (Replaces 246-123, SP 34)
DU-SPP-36-__-__	36"	Less Access Door (Replaces 246-133)
DU-SPP-40-__-__	40"	Less Access Door (Replaces SP 40)
DU-SPP-42-__-__	42"	Less Access Door (Replaces 246-150)
DU-SPP-48-__-__	48"	Less Access Door (Replaces 246-177)

**EXHAUST STACK KITS:** Exhaust Stack Kits include: (3) 3ft-Plain Exhaust Duct sections, (1) 3ft-Universal Stack with Access Door, and (1) Roof Ventilator

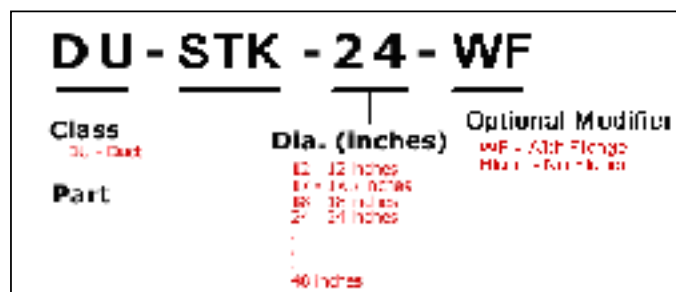

Part No.	Description	Notes
DU-STK-12-WF	12"	with Flat Roof Flange
DU-STK-18-WF	18"	with Flat Roof Flange
DU-STK-24-WF	24"	with Flat Roof Flange
DU-STK-30-WF	30"	with Flat Roof Flange
DU-STK-34-WF	34"	with Flat Roof Flange
DU-STK-36-WF	36"	with Flat Roof Flange
DU-STK-40-WF	40"	with Flat Roof Flange
DU-STK-42-WF	42"	with Flat Roof Flange
DU-STK-48-WF	48"	with Flat Roof Flange


**Less Roof Flange**

DU-STK-12	12"	Less Roof Flange
DU-STK-18	18"	Less Roof Flange
DU-STK-24	24"	Less Roof Flange
DU-STK-30	30"	Less Roof Flange
DU-STK-34	34"	Less Roof Flange
DU-STK-36	36"	Less Roof Flange
DU-STK-40	40"	Less Roof Flange
DU-STK-42	42"	Less Roof Flange
DU-STK-48	48"	Less Roof Flange

**MUFFLERS:** Exhaust Air mufflers will assist with site sound management. The units are to be installed between the exhaust system origination point and the exhaust fan. Each installed muffler can reduce the noise level from 2 - 5 dB in most situations. All sizes are manufactured from galvanized steel and acoustical sound attenuation materials, and included one fan connector ring.

MUF-18365	18"	Sound Management
MUF-24361	24"	Sound Management
MUF-34362	34"	Sound Management
MUF-40363	40"	Sound Management

**ELBOWS:** Full radius throat and pipe diameter design/construction allow for a smooth interior surface. Minimized airflow resistance, turbulence and exhaust air noise management is superior versus others and can be utilized in most applications. All sizes constructed from galvanized steel and may require Connector Rings on each end. Indicate the number of Connector Rings needed. Rings ship loose.

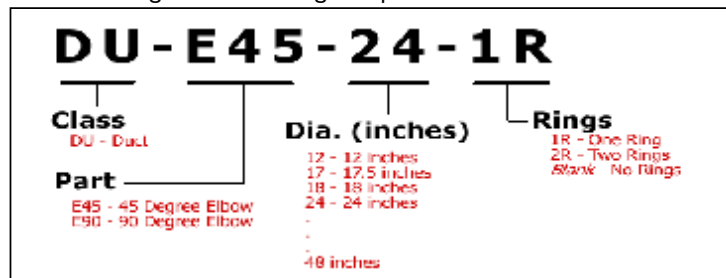

**45 Degree Elbow**

DU-E45-12	12"	Less Connector Rings
DU-E45-18	18"	Less Connector Rings (Replaces 246-001)
DU-E45-24	24"	Less Connector Rings (Replaces 246-003, XH-4595)
DU-E45-30	30"	Less Connector Rings (Replaces 246-007)
DU-E45-34	34"	Less Connector Rings (Replaces 246-009, XH-4505)
DU-E45-36	36"	Less Connector Rings (Replaces 246-011)
DU-E45-40	40"	Less Connector Rings (Replaces XH-4515)
DU-E45-42	42"	Less Connector Rings (Replaces 246-013)
DU-E45-48	48"	Less Connector Rings (Replaces 246-015)

Part No.	Description	Notes
<b>90 Degree Elbow</b>		
DU-E90-12	12"	Less Connector Rings
DU-E90-18	18"	Less Connector Rings (Replaces 246-002)
DU-E90-24	24"	Less Connector Rings (Replaces 246-004, ELB-24)
DU-E90-30	30"	Less Connector Rings (Replaces 246-008)
DU-E90-34	34"	Less Connector Rings (Replaces 246-010, ELB 34)
DU-E90-36	36"	Less Connector Rings (Replaces 246-012)
DU-E90-40	40"	Less Connector Rings (Replaces ELB 40)
DU-E90-42	42"	Less Connector Rings (Replaces 246-014)
DU-E90-48	48"	Less Connector Rings (Replaces 246-016)

**CONNECTOR RINGS:** For connecting the exhaust fan to other exhaust system stack components. Connector Ring price is not included in duct pricing unless indicated. Indicate the number of rings and if rings are to be welded to duct or shipped loose. One (1) connector ring is supplied with fan assemblies as standard.

409-112	12"
FR-1811	18"
FR-2411	24"
409-130	30"
FR-3411	34"
409-136	36"
FR-4011	40"
409-142	42"
409-148	48"

**ACCESS DOORS:** Removable door for inspecting and cleaning duct work and the exhaust fan. Access door price is not included in duct price unless indicated.

DU-SDD-1212	12"
DU-SDD-1718	17" to 18"
DU-SDD-2224	22" to 24"
DU-SDD-2932	29" to 32"
DU-SDD-3336	33" to 36"
DU-SDD-3740	37" to 40"
DU-SDD-4144	41" to 44"
DU-SDD-4548	45" to 48"

**BAFFLES:** Required for rear exhaust applications.

EB1	12" to 24"
EB2	30" to 42"

**AUTOMATIC SHUTTER:** For exhausting through side of building. Non-motorized, gravity louvers built into a square housing. Includes square to round transition (Adapter Flange).

DU-SHW-12-12	12" x 12" w/AF
DU-SHW-18-18	18" x 18" w/AF (Replaces 630-015)
DU-SHW-24-24	24" x 24" w/AF (Replaces 630-016)
DU-SHW-27-27	27" x 27" w/AF (Replaces 630-017)
DU-SHW-30-30	30" x 30" w/AF (Replaces 630-018)
DU-SHW-36-34	36" x 36" w/AF 34 Duct (Replaces 630-019)
DU-SHW-36-36	36" x 36" w/AF 36 Duct (Replaces 630-062)
DU-SHW-42-40	42" x 42" w/AF 40 Duct (Replaces 630-036)
DU-SHW-42-42	42" x 42" w/AF (Replaces 630-020)
DU-SHW-48-48	48" x 48" w/AF (Replaces 630-021)

Part No.	Description	Notes
<b>GUY WIRE KITS:</b> Includes 50ft of 1/8" cable, anchors, turnbuckles and clamps for installation of 3 guy wires to exhaust stack. Connector Ring sold separately.		
DU-GWK-12	12"	(Replaces 630-030)
DU-GWK-14	14"	
DU-GWK-16	16"	
DU-GWK-17	17.5"	
DU-GWK-18	18"	(Replaces 630-031)
DU-GWK-24	24"	(Replaces 630-032)
DU-GWK-27	27"	(Replaces 630-033)
DU-GWK-28	28"	
DU-GWK-30	30"	(Replaces 630-044)
DU-GWK-34	34"	(Replaces 630-035)
DU-GWK-36	36"	(Replaces 630-041)
DU-GWK-40	40"	
DU-GWK-42	42"	(Replaces 630-036)
DU-GWK-48	48"	(Replaces 630-037)

**RECTANGULAR DUCT**

7002	Rectangular Duct for 15' Height	
7014	44" - 2 Flanges	
7017	44" X 36" Hi-Capacity 2 Flanges	
HES4336	Exhaust Cap Hi-Capacity 36" x 44"	
HES4326-25	Exhaust Cap 26" x 44"	
AIH4336	Intake Stackhead Hi-Capacity 36" x 44"	
AIH4326-25	Intake Cap 26" x 44"	

**CHIMNEY COMPONENTS (Older Indirects)**

7100	For 15' Ceiling	
7121	1 meter extension	
7120	2 meter extension	
7123	3 meter extension	
7124	1 meter connector	
7125	Chimney Cap	

**DAMPERS & ACCESSORIES**

2121	Brackets	BT1200 RC, Rod Brackets
39101	Pivot	Blk Plastic/Turbo Fan Dampers
39102	Pivot	Blk Plastic/Turbo Fan Dampers w/Square Drive
39103	Lever Arm	Blk Plastic/Turbo Fan Dampers
39106S	18"x 27"	OB Damper Retrofit/Turbo Fan - Sealed
39111	34" Square	OB Damper, BT / Pyramid on Exhaust
39112	43" x 25.5"	OB Damper, BT Recirc Group / 10% Open
39113	Damper Linkage	Retro Kit, Connection to Recirc Damper
39119	40" x 40"	OB Damper, Truck - Forced Dry Exhaust
39120S	14"x 27"	OB Damper Retrofit / Turbo Fan - Sealed
39121	25.5" x 59"	OB Damper, 4-Motor Group on Exhaust Duct
9030018	Rotation Plate	Plastic Bushings on Ultra Group
9040685	Main Damper	Recirculation, For Pre-Filter "ONLY" Group
9043079	Lever Arm	Connect Arm w/"U" Bolt, For Ultra Group #9043248
9043102	Intake	For Ultra Group #9043248
9043248	Ultra Damper	Recirculation For Pre / Post Filter Group

Part No.	Description	Notes
90603	Crank Arm	For BT/Pyramid Damper # 39111
90605	43" x 25.5"	OB Damper, BT Recirc / Sealed / 6 Motor
91100	Ball Joint	Used on Prep Extractor
BSH625	Bushing	Aluminum/Turbo Fan Dampers
DL145	Rod	BT1200 RC, Long
DL2104	Linkage Arm	BT1200 RC & IRC
DRE2104	Shaft Extension	BT1200 RC & IRC
DRL0422	Damper Linkage	AMU7500 Non Heated
DVA-5084	Drive Brush	includes Collar, for Damper Motor
XH-2475	24"	Pneumatic Damper Kit with Access Door
XH-3480	34"	Pneumatic Damper Kit with Access Door
XH-4085	40"	Pneumatic Damper Kit with Access Door

**VELOCITY CONE:** Used in some jurisdictions to conform to exhaust velocity requirements.


DCW-24-21-12	Velocity Cone
DCW-34-24-38	Velocity Cone

**MISCELLANEOUS -** *These items will ship from Mexico*

AIH3400	34"	Intake Cap, Air Inlet Hood
ELB 24225-K2	24"	Offset Elbow, 22 1/2 degree (Qty. 2)
ELB-24	24"	90 Degree Elbow 1/2 Throat
ELB-34	34"	90 Degree Elbow 1/2 Throat
ELB34225-K2	34"	Offset Elbow, 22 1/2 degree (Qty. 2)
XH-4273	24"	Collar and Plate Assembly
XH-4274	34"	Collar and Plate Assembly
XH-4277	40"	Collar and Plate Assembly
XH-9091	10" Pipe	90 Degree Elbow
XH-9093	10" Pipe	Roof Flange, Fireproof 0 Degree
XH-9094	10" Pipe	Stack Flashing, Storm Collar
XH-9095	10" Pipe	Bake Exhaust Stack

**TYPICAL DUCT INSTALLATIONS**

Different components are used to make up the systems shown. The diagrams below illustrate how the different components are used to make up the several systems. All motor and fan locations must be decided before installation, to ensure proper hardware is equipped with the booth. For unusual applications consult Global for recommendations.

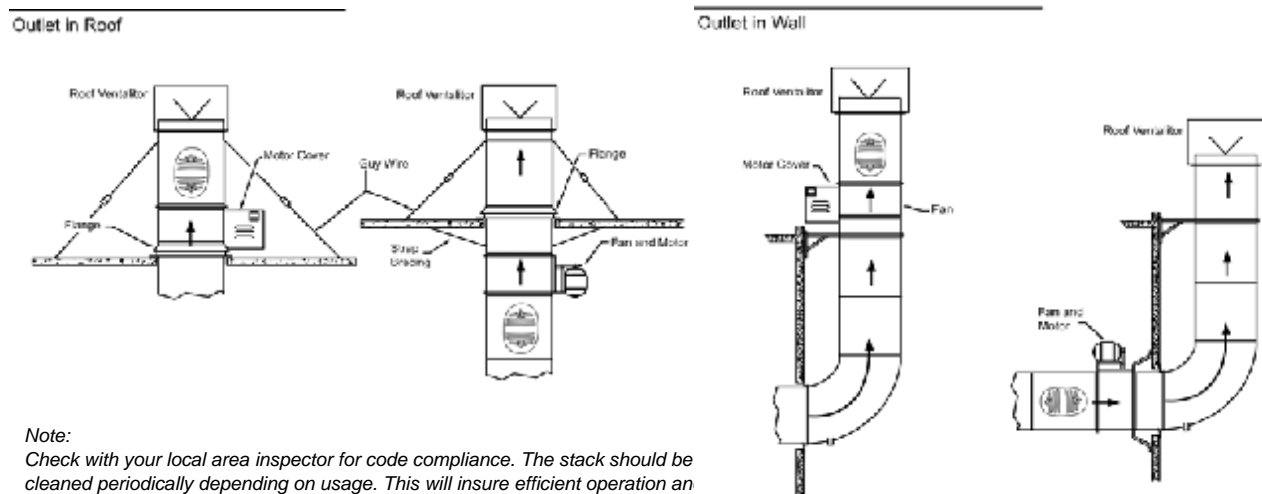

*Note:*  
Check with your local area inspector for code compliance. The stack should be cleaned periodically depending on usage. This will insure efficient operation an lesson the danger of fire when combustibile materials have been used.

Part No.	Description	Notes
<b>DOORS</b>		
<b>Seals</b>		
248-003	Seal Tape	.50 X .25 Closed Cell per Ft.
248-004	Seal Tape	.50 X .50 Closed Cell per Ft.
248-007	Tape Butyl	3/16" X 5/8" Wide 30' Roll (ea.)
248-011	Rubber Strip	.125 X 3.0 W per Ft.
248-012	Rubber Strip	.125 X 4.0 W per Ft.
248-013	Rubber Strip	.125 X 5.0 W per Ft.
248-014	Rubber Strip	.125 X 6.0 W per Ft.
248-021	Rubber Strip	.125 X 8.0 W per Ft.
248-023	Rubber Strip	.125 X 10.0 W per Ft.
248-082	Seal Tape	P Seal - EPDM Per Ft.
248-087	Tape Adhesive	1/4" X 3/4" Wide Open Cell per Ft.
248-089	Silicone Rubber	1/8" Thick X 5" Wide, per Ft.
29-1480	Binks Door Wiper Seal	12'L x 3"W x 1/8"H per Ft.
29-1481	Binks Bi-Fold Seal	8' Lengths per Ft.
29-1482	Binks "T" Seal	9' Lengths per Ft.
29-1484	Binks "U" Seal	30' lengths per Ft.
39056	Blowtherm Door Seal	13' & 14' Cabins per Meter
DGK-2000	Foam Tape	Double Skin Booths 3/4" X 3/4" X 25' (4/case)
KDS	Seal Kit Bi/Tri Fold	Old DeVilbiss only SDD, XD, CII, CIIC
SS-00748-K4	Black Rubber	S.S. Booths 15'x7"x1/8" (4/case)
SS-00749-K10	Foam Tape	S.S. Booths Grey 12-1/2'x3/4"x1-1/2 (10/case)
SS-00777	Foam Tape	.5 X .5 X 12.5' Roll (LT FXT) Per Ft.
SS-9688	V Seal	108" Long w/Retainer Strip
SS-9874-K15	Foam Tape	S.S. Booths Black 34'x1/4" x 3/8" (15/case)

**Hinges**

208-029	Door Hinge	4W X 10L X .125T, Butt Hinge - Steel
208-029A	Hinge Pin	.375 Dia For #208-029
208-030	Hinge	2.5W X 10L X .125T Half Swaged St
208-030A	Hinge Pin	.375 Dia For 2.5W X 10L X .12
208-033	Door Hinge	1.75 W X 8 IN L, Butt Hinge - Steel
208-411	Door Hinge	5869X EBERHARD BBO
39035	Door Hinge	Outer Large 2 Eyelet Pers/Front
39036	Door Hinge	Inner 2 Eyelet Frontal
39037	Door Hinge	Inner 3 Eyelet Frontal
39046	Door Hinge	Outer Small 3 Eyelet Pers/Front
39057	Hinge Pin	Supplied with C-Clip HP62511 & SN12
DHA04110	Door Hinge Assembly Kit	Open - Concept Cure (Blowtherm)
DHA05111	Door Hinge Assembly Kit	Closed - Concept Cure (Blowtherm)
KHDC-2000	Center Door Hinge Kit	DeVilbiss System 2000
KHDS-2000	Side Door Hinge Kit	DeVilbiss System 2000
SN12	Snap Ring	Hinge Pin

Part No.	Description	Notes
<b><i>Handles &amp; Latches</i></b>		
208-037	Brixon Latch	#3P, Zinc
208-094	Brixon Latch	#2P Zinc
208-252	Handle	5" O/A LG Surface MTG ZN
208-413	Latch Kit	S-5654-XP24 EBERHARD BBO
39047	Door Handle	Metal/Personnel/Frontal
39049	Door Handle Pins	Pin and C- clip (Use w/39050)
39050	Door Closure Latch	Lever Lock
39051	Door Handle	White Plastic 6" Frontal (DH2555)
90602	Prep Filter Door Handle	Black Plastic
HBL-100	Brixon Latch	Used on older DeVilbiss & Binks
KDH	Door Handle Kit	DeVilbiss System 2000
SS-9679	Roller Latch & Striker	

***Doors & Components***

230-001	Observation Window	18"W x 24" Tempered Glass
230-195	Observation Window	24"W x 48" Tempered Glass
39034	Door Striker Plate	Short (Personnel Door)
39038	Door Striker Plate	Long (Frontal Doors)
39049	Door Handle Pin	Pin and Clip
DP38A	Personnel Door White	w/Frame and Hardware for Ultra Mix Room
DP38C	Personnel Door White	w/Frame and Hardware (3'W X 8'8"H) (replaces DP39C) Concept Mix Room
FFC234	Frame for Filter Doors	
FFC333	Frame Crate	For 3 Wing Frontal
FFC3810P	Pyramid	Frame for Pyramid
FFC401	Frame for 4 Wing Frontal	
FRC212	Filter Door Frontal Crate	
FRC332	Frontal Crate 3 slabs	No Side Panels
FRC3810P	Pyramid Doors	3 Slabs
FRC411	Frontal Crate 4 slabs	Includes 2 18" Side Panels
FRC41109	4 Wing Frontal	4 Slabs, No Side Panels
MADG-36084-L	Personnel Access Door	36" W x 7' 0" H, Left-hand Door Swing (412-003L)
MADG-36084-L-O	Personnel Access Door w/ Window	36" W x 7' 0" H, Left-hand Door Swing (412-004L) with observation window
MADG-36084-R	Personnel Access Door	36" W x 7' 0" H, Right-hand Door Swing (412-003R)
MADG-36084-R-O	Personnel Access Door w/ Window	36" W x 7' 0" H, Right-hand Door Swing (412-004R) with observation window
640-101	Door Installation Kit	1 Kit Required per Door Installation
WK-1824-MANDOOOR	Observation Window Kit	18" x 24" (412-018)

Part No.	Description	Notes
<b>Hardware</b>		
208-024	Door Magnet	Older DeVilbiss (SS-01514)
208-422	Caster	2000# T90CR625VG BBO Cart
221-215	Rivet	BBO Door Gasket
39021	Door Eyelet	White Plastic 3 per Rod
39054	Door Lock with Key	
39055	Door Clicker	Personnel / Frontal Door ea.(2 Required)
39058	Door Shims	Brass Bushings for Hinge Pin
39061	Fusible Link	(Brass) for Fire Damper
39062	Fusible Link	(Sheet Metal) for Fire Damper
6MM CAGE NUT	Cage Nut	6MM (Light Cover)
BH620	Bolt for Light Cover	(BS616) Used on Frontal (6mm x 20mm)
9CA0105	Parts Track Hardware Kit	Rollers, Hangers, Brackets, etc
DH410	Hardware	for 4 Wing Frontal
LMA01109	Locking Mechanism	Kit, Less Rods
LR7551	Door Closing Rods	Metric Booths Only 50-1/2"
NC8	Cage Nut	8MM-1.25
NH8	Hex Nut	8MM-1.25 Finished Zinc PLTD
PMR-129	Door Closer	
PRT01140	Parts Track	(2 per Booth) Sold as Each
SS-02024	6" Foot Bolt	Older DeVilbiss
WF816	Flat Washer	8MM X 16 OD

Part No.	Description	Notes
<b>MISCELLANEOUS</b>		
<b><i>Weatherite Replacement Parts</i></b>		
ACR-418	Damper Motor /Actuator	120V w/Linkage
ECD-1006	Cool Down Timer	WR-9024
ECR-1008	Control Relay 4PDT	WR-9029
ECR-1009	Control Relay 2PDT	WR-9030
ECT-1002	Cure Timer	WR-9028
EDS-1013	Temp Sensor	WR-9018
EFA-1023	Fire Eye Amplifier	WR-9021
EFR-1025	Flame Rod	WR-9039
EFS-1040	Air Flow Switch	WR-9002
EHS-1019	Hi Limit Thermostat	WR-9005
EMA-1011	Amplifier Maxitrol	WR-9017
ESP-1024	Spark Electrode	WR-9015
ETS-1004	Temp Selector Paint/Cure	WR-9019
WR-9001	Summer/Winter Switch	
WR-9009	Temp. Selector 55-90 degree	
WR-9010	Temp Selector 55-140 deg.	Limited Supply
WR-9012	Scanner Ultra Violet	
WR-9013	Timing Card	Limited Supply
WR-9023	Non Recycle Flame Relay	
WR-9033	Booth Light Switch	
WR-9043	Flange Bearing	Motor Side
WR-9044	Flange Bearing	
WR-9053	Door Handle	"Lift & Turn"
WR-9054	Vent Lock Handle	

***ITW DeVilbiss Spray Equipment***

DAD-1	Dessicant Refill	
DAD-400	Humidity Indicator	
DAD-500	Dessicant Air Dryer	
DAD-503	Air Station w/ Dessicant	
DAD-8	Air Filter 74 Micron	
GA-288	Pressure Gauge	16 #, 2" Diameter
HAF-18	Auto. Mechanical Drain	
HAF-26	Baffle Kit	
HAF-28	Filter Element	Coalescing 55 cfm
HAF-404	Filter Change Indicator	
HAF-505	Coalescing Filter 55 cfm	
HAF-6	Element & O Ring Kit	100 scfm
HAF-8	Replacement Plastic Bowl	100 scfm
HAR-502	Obsolete	use HAR-511
HAR-507	Air Regulator 60 CFM	
HAR-508	Regulator 0-125 PSI	
HAR-511	Regulator 60 SCFM	
MPV-530	Breathable Air Hose Assy.	30'
MPV-550	Breathable Air Hose 50'	
MPV-625	Air Supplied Respirator	
MPV-651	Breathable Air System	Complete w/ DAD-503

*Other ITW Devilbiss items available upon request, these are the most requested items.*

Part No.	Description	Notes
<b><i>Water Wash/Washer</i></b>		
101-365	Nozzle	Shower Head
238-1011	Gasket	4" Dresser Coupler
238-827	Float Valve	.50 MPT - Brass
29-1101	Venturi	14" Diameter
29-1103	Nozzle 3TFXW-1120 Steel	3-1/2 turns 2" NPT
29-1170	Nozzle 3TFXW-4698 Steel	3 turns, 1-1/2" NPT
HUS-509-K25	Nozzle Turboclean	
<b><i>Grates/Pans</i></b>		
GP-3136	Pit Grate	31" X 36" X 1 1/2" Black
GP-H-235	H-Grate	24" X 43" Black
PDT00	0% Pit Pan	
PDT15	15% Pit Pan	
PDT32	32% Pit Pan	
PDT50	50% Pit Pan	
PDT70	70% Pit Pan	
PWG2736	27" X 36"	Pit Wire Grid
PWG2438	24" X 38"	Pit Wire Grid
<b><i>Floor Channels</i></b>		
FLC8-0480	48" Floor Channels	
FLC8-0680	68" Floor Channels	
FLC8-0700	70" Floor Channels	
FLC8-0720	72" Floor Channels	
FLC8-0920	92" Floor Channels	
FLC8-0960	96" Floor Channels	
FLC8-1160	116" Floor Channels	
FLC8-1200	120" Floor Channels	
FLC8-1440	144" Floor Channels	
<b><i>Tie Angles (Corner Angles)</i></b>		
TG4-0240	24" Tie Angles	(1L-24)
TG4-0360	36" Tie Angles	(1L-36)
TG4-0480	48" Tie Angles	(1L-48)
TG4-0600	60" Tie Angles	(1L-60)
TG4-0720	72" Tie Angles	(1L-72)
TG4-0840	84" Tie Angles	(1L-84)
TG4-0960	96" Tie Angles	(1L-96)
TG4-1080	108" Tie Angles	(1L-108)
TG4-1200	120" Tie Angles	(1L-120)
TG4-1440	144" Tie Angles	(1L-144)
<b><i>Panels</i></b>		
PG8HS-24036	24" X 36" Panel	(2-2436)
PG8HS-24048	24" X 48" Panel	(2-2448)
PG8HS-24060	24" X 60" Panel	(2-2460)
PG8HS-24072	24" X 72" Panel	(2-2472)
PG8HS-24108	24" X 108" Panel	(2-24108)
PG8HS-24120	24" X 120" Panel	(2-24120)
PG8HS-24144	24" X 144" Panel	(2-24144)
PG8HS-24136	24" X 144" Panel	(2-24144)

Part No.	Description	Notes
PG8HS-30048	30" X 48" Panel	(2-3048)
<b>Panels</b>		
PG8HS-30072	30" X 72" Panel	(2-3072)
PG8HS-30084	30" X 84" Panel	(2-3084)
PG8HS-30096	30" X 96" Panel	(2-3096)
PG8HS-30108	30" X 108" Panel	(2-30108)
PG8HS-30120	30" X 120" Panel	(2-30120)
PG8HS-30144	30" X 144" Panel	(2-30144)
PG8HS-36036	36" X 36" Panel	(2-3636)
PG8HS-36048	36" X 48" Panel	(2-3648)
PG8HS-36060	36" X 60" Panel	(2-3660)
PG8HS-36072	36" X 72" Panel	(2-3672)
PG8HS-36084	36" X 84" Panel	(2-3684)
PG8HS-36096	36" X 96" Panel	(2-3696)
PG8HS-36108	36" X 108" Panel	(2-36108)
PG8HS-36120	36" X 120" Panel	(2-36120)
PG8HS-36144	36" X 144" Panel	(2-36144)
<b>Light Panels</b>		
PG8HL-24060	24" X 59 5/8" Light Panel	(2LA-2460)
PG8HL-24072	24" X 72" Light Panel	(2LA-2472)
PG8HL-24096	24" X 96" Light Panel	(2LA-2496)
PG8HL-24108	24" X 108" Light Panel	(2LA-24108)
PG8HL-24120	24" X 119 5/8" Light Panel	(2LA-24120)
PG8HL-36072	36" X 72" Light Panel	(2LA-3672)
PG8HL-36084	36" X 84" Light Panel	(2LA-384)
PG8HL-36096	36" X 96" Light Panel	(2LA-3696)
PG8HL-36108	36" X 108" Light Panel	(2LA-36108)
PG8HL-36120	36" X 120" Light Panel	(2LA-36120)
PG8HD-36120	36" X 120" Light Panel	Double (2LA-36120-2)
PG8HL-36144	36" X 144" Light Panel	(2LA-36144)
PG8HD-36144	36" X 144" Light Panel	Double (2LA-36144-2)
<b>Filter Racks</b>		
FRAG8-E2-20020	20" X 20" Filter Rack	
FRAG8-E2-20040	20" X 40" Filter Rack	
FRAG8-E2-20060	20" X 60" Filter Rack	
FRAG8-E2-20080	20" X 80" Filter Rack	
FRAG8-E2-20100	20" X 100" Filter Rack	
FRAG8-E2-20120	20" X 120" Filter Rack	
FRAG8-E2-20140	20" X 140" Filter Rack	
<b>Insulation</b>		
248-041	Mineral Wool	4# DEN 4 X 24 X 48, Per Foot
248-204	PV Board	FBX1900 1.0 X 24 X 36

Part No.	Description	Notes
<b><i>Other Miscellaneous</i></b>		
127-338	Distribution Block	9080LBA365212
217-081	Booth Floor Covering	36" X 500' 70 Mil Fire Retardent Paper
217-082	Booth Floor Covering	42" X 500' 70 Mil Fire Retardent Paper
217-083	Booth Floor Covering	60" X 500' 70 Mil Fire Retardent Paper
217-084	Booth Floor Covering	72" X 500' 70 Mil Fire Retardent Paper
221-139	Ratcheting Strap	1" W X 15' Long
236-020	Caulk	Acrylic Latex
236-040	Booth Coating	Solvent Base, Clear (5gal. Container)
236-041	Booth Coating	Solvent Base, White (5gal. Container)
248-002	Seal Tape	.50 X .75 Open Cell
248-095	Adhesive Tape	3/4 X 1" Open Cell, Press on #P8575